All About Light

Illuminate architecture and exteriors

Catalogue 2023/24



DAOU®

VISUALIZE AND EMPHASIZE ARCHITECTURE BY NIGHT

THE COMPANY 3

PRODUCT INDEX 9

HOW TO READ THE CATALOGUE 11

REFERENCES 15

OPTICAL SYSTEM 29

LIGHT COLOUR TECHNOLOGY 31

LUMINAIRES 33


FLOODLIGHTS 33


LINEAR SYSTEMS 141


GROUND LUMINAIRES 187


WALL LUMINAIRES 253


UNDERWATER LUMINAIRES 287

THE COMPANY

YES, THE LIGHT

We work closely with lighting designers, architects and engineers around the world to co-create engaging lighting solutions and appealing outdoor spaces.



Made in **Quality**

DAOU is a global-oriented company that specialized in outdoor lighting products and solutions, based in Zhejiang China, from more than 13 years now, we have been developing and producing durable luminaires for partners all over the world.

Our focus is never large -scale production, but the capacity to create new ideas, implement the communication between concepts and realities. With our dedication to the perfect manufacturing process, our understanding for light and shadow, and our minimalist products, we have been working with designes and lighting architects to create a number of interactive and iconic projects. We use artistic thinking and attitude to narrate, redefine the relationship between people and the environment with light, and awaken the spirit of architecture.


We understand outdoor lighting projects are not transient, but long-term commitments, so we design and manufacture luminaires with the highest quality materials and can be proven over time. Also, our luminaires are able to meet both the technical and aesthetic requirements of any projects thanks to elegant and functional design.

The development of LEDs is both a major technological evolution and a significant challenge for lighting manufacturers, our research & innovation department is open to constant upgrades and strive to improve the durability and performance of our products. All luminaires are realized using the latest technologies and with cutting-edge components that guarantee reliability and long lasting efficiency.

We pay great attention to the quality of the products. Quality and safety testing are a particularly important part in design and production, each luminaire is analyzed by technical specification and compliance.

13+


Years of experience

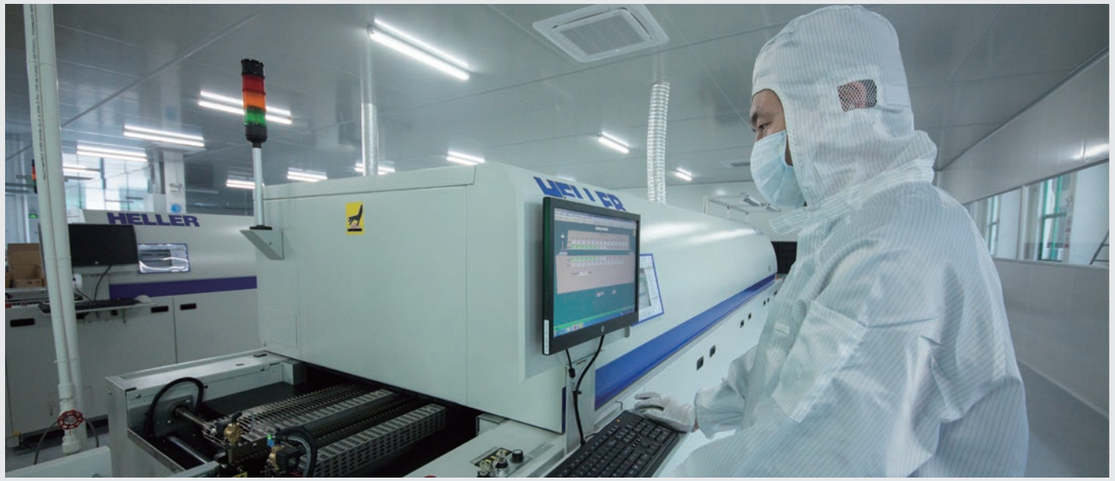





THE COMPANY

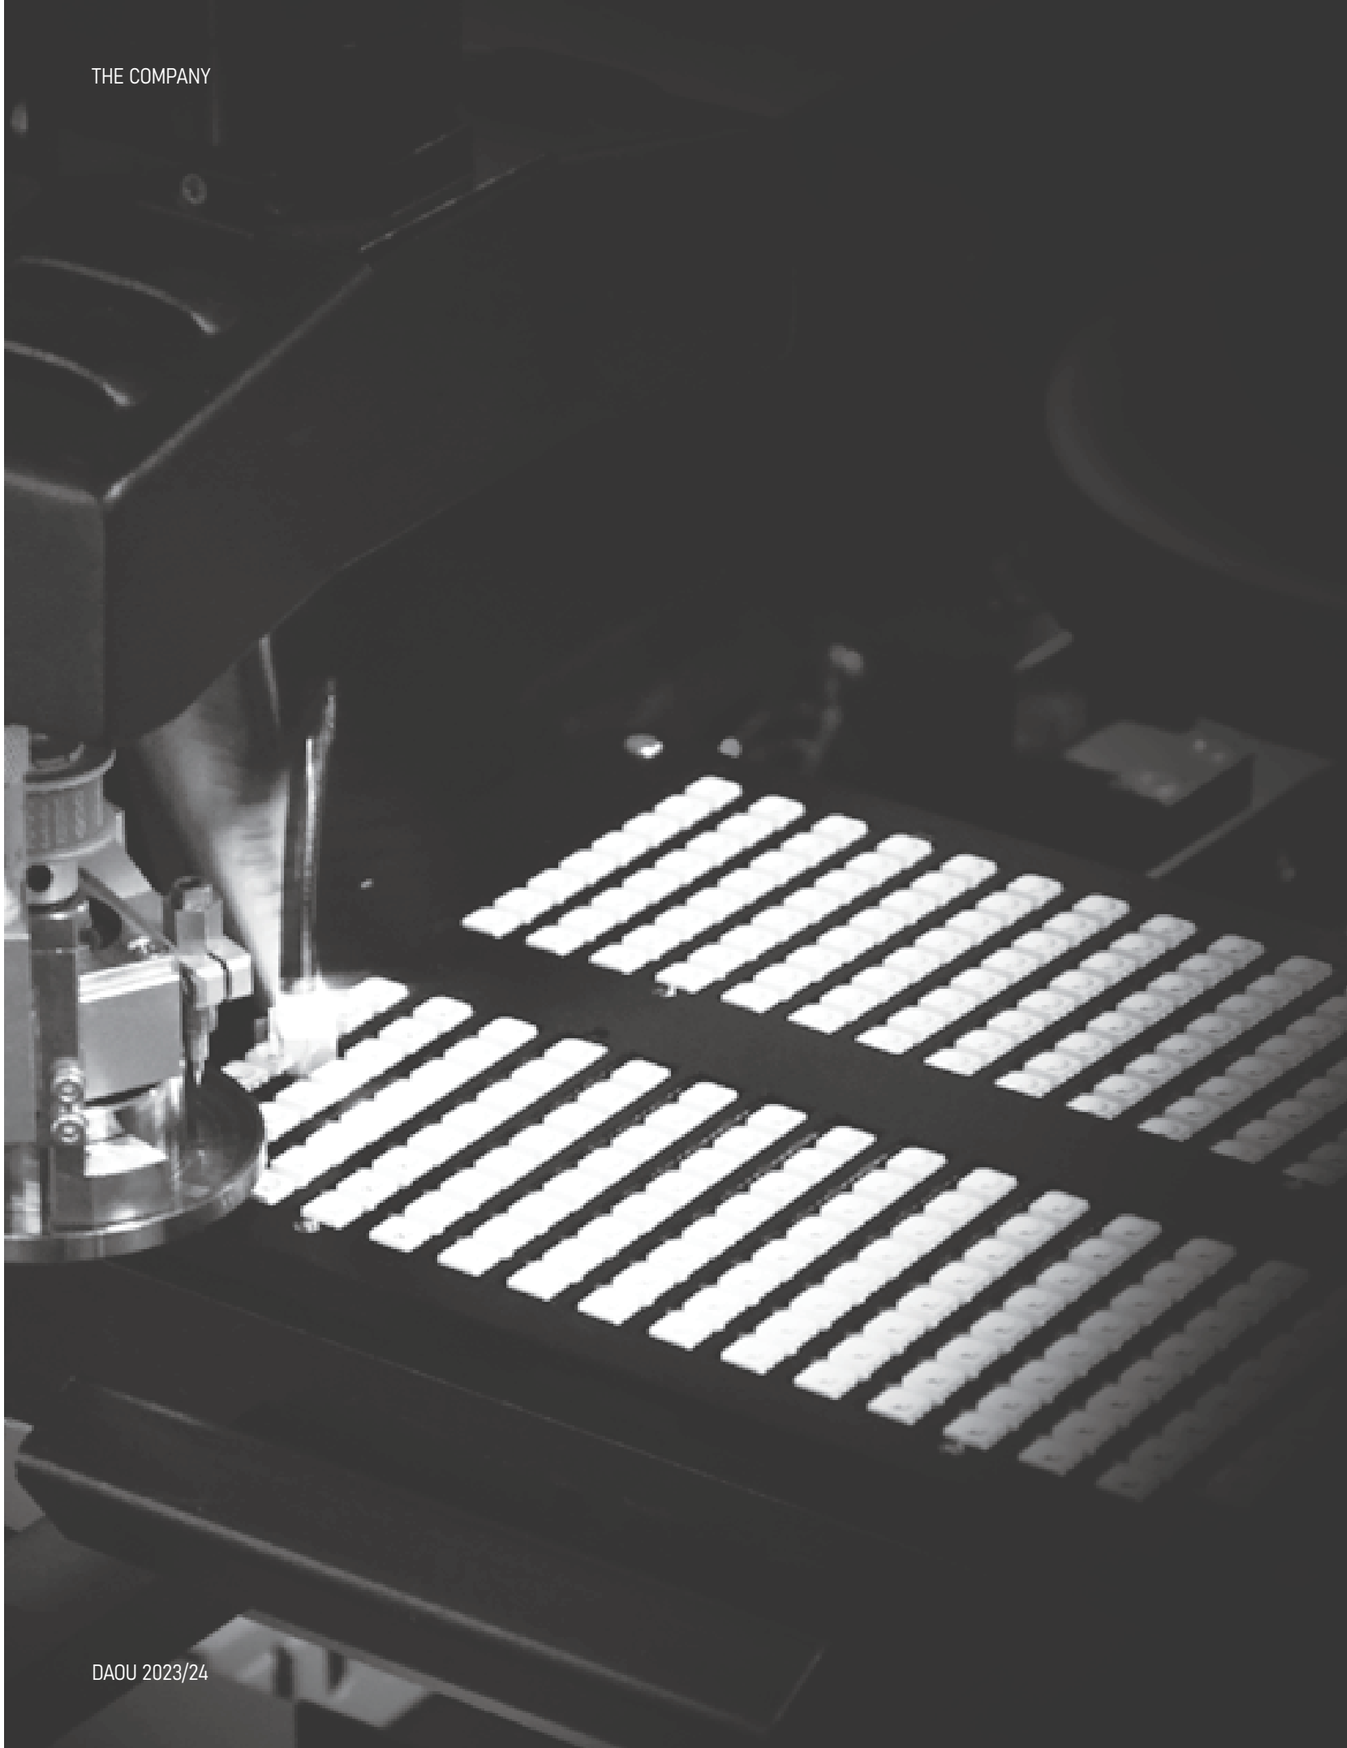

OUR VALUE

By combining advanced optical engineering with a deep understanding of outdoor architectural lighting, we design and manufacture unique, innovative high performance LED luminaires and lighting solutions that perfectly satisfy the demands of projects all over the world.

With a continued focusion using our experience and products to deliver more efficient and more brilliant lighting solutions, we aim to build a positive difference between in environment and communities around the globe.

30+

Countries of export

500+

Projects used our products

PRODUCT INDEX

FLOODLIGHTS

from 33 to 122


HIGHLAND
35 new


CUBE 2.0
49 new


ARKOS
69


SERRA
95


DELTA
109

WALL LUMINAIRES

from 253 to 286


BLADE L
255 new


BLADE M
261


BLADE S
267



NIKO WALL
273


NIKO CEILING
281

MINI FLOODLIGHTS

from 123 to 140


CUBE MINI
123 new


SERRA MINI
131 new

UNDERWATER

from 287to 302


CATCH SPOT
289 new


CATCH UPLIGHT
295 new

LINEAR SYSTEMS

from 141 to 186


YORK L
143


YORK M
151


YORK S
163


UNI-LINE
181

GROUND LUMINAIRES

from 187 to 252


SONAX SQUARE
189 new


SONAX
199


DAN 2.0
215



ARC-SIDE
235


GOCCIA
243

HOW TO READ THE CATALOGUE




1. Product name
2. Representive image of this product
3 Scan to visit websit page
4. Pictograms of product features
5. Product introduction
6. Finish colour

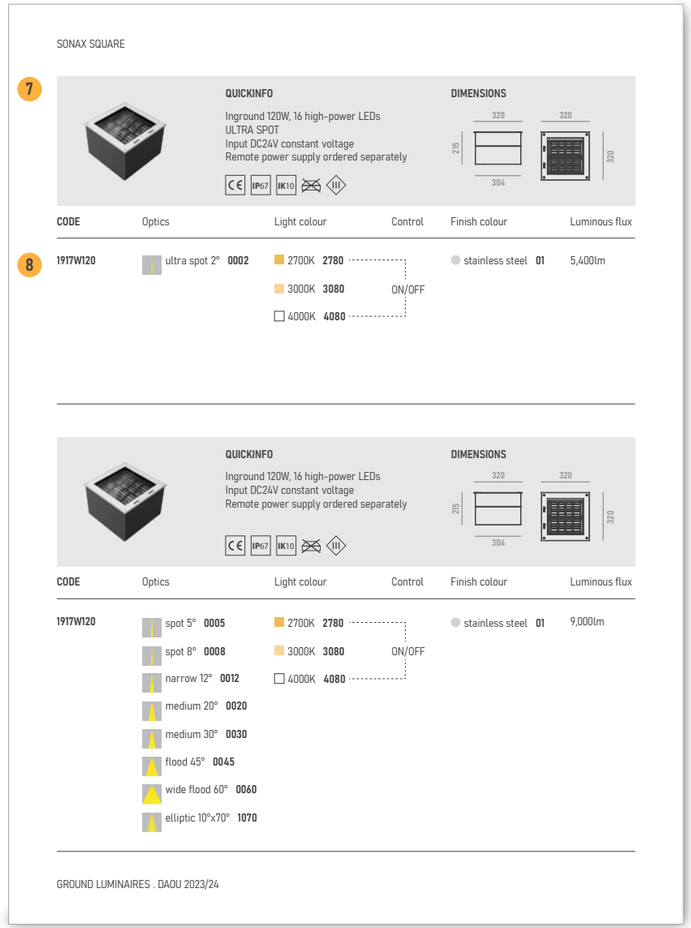

7. Quick information of this product

8. Guide to complete the product code on request

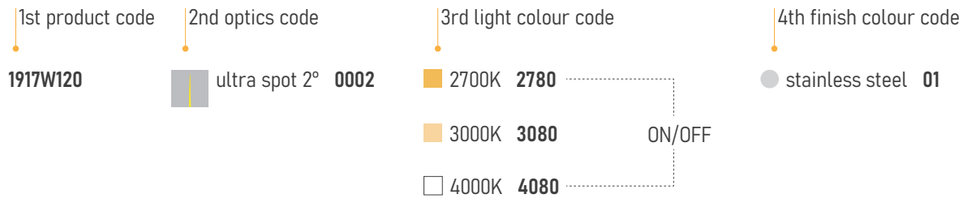


Floodlights


Linear luminaires


Ground-mounted luminaires


Wall-mounted luminaires


Underwater luminaires


Luminaire adjustable on horizontal axis


Luminaire adjustable on vertical axis


Adjustable optical system


Luminaire can be walked over


Luminaire can be drived over


Outdoor installation


Ceiling mounted


Wall mounted


Ground mounted


Ceiling, wall or ground mounted


High visual comfort


High lumen package for long-throw


LED light source



New product



Europe conformity


Light colour RGB


Light colour RGBW


Light colour 3-IN-1


Light colour 4-IN-1


Light colour 7-IN-1



Protective degree

IP65 Dust-tight and jet-proof
IP66 Dust-tight and powerful water jet-proof
IP67 Dust-tight and water-tight (immersible)
IP68 Dust-proof and sealed against submersion



Shock resistance

IK05 Protected against impact energy 0.7 Joule shocks
IK06 Protected against impact energy 1 Joule shocks
IK07 Protected against impact energy 2 Joule shocks
IP08 Protected against impact energy 5 Joule shocks
IK09 Protected against impact energy 10 Joule shocks
IK10 Protected against impact energy 20 Joule shocks


RAL finish colour on request



Class I


Class III


Power supply not included


Power supply included



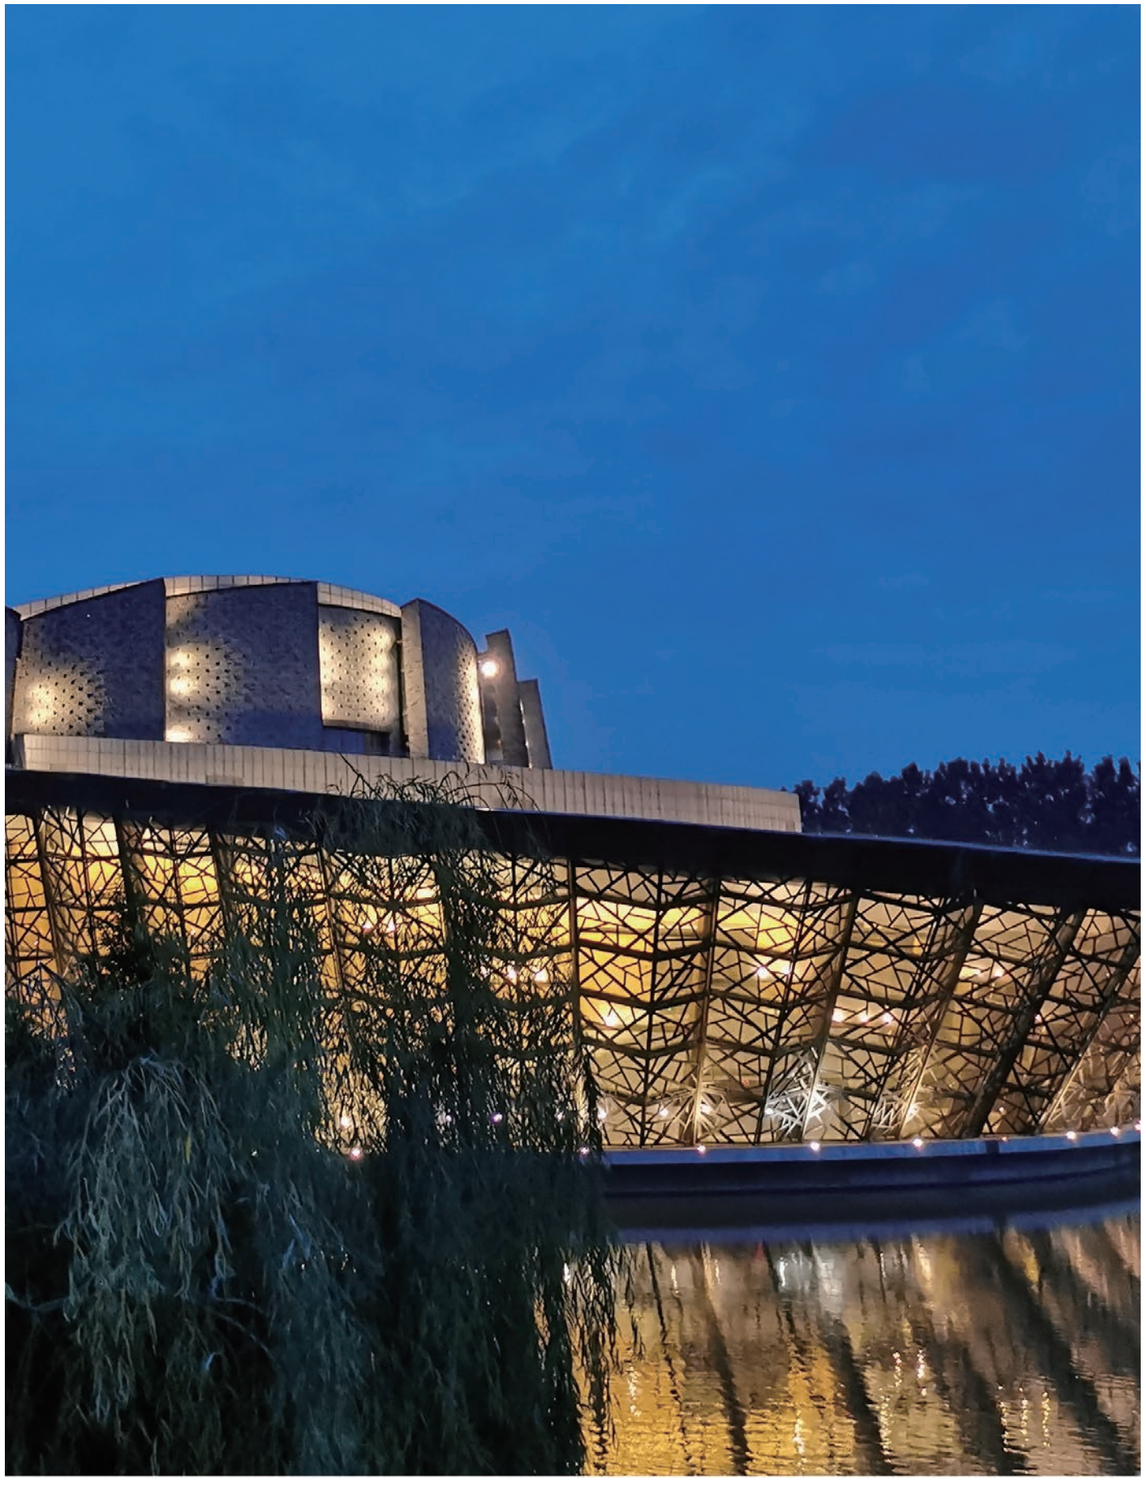






武汉图书馆
物外书店








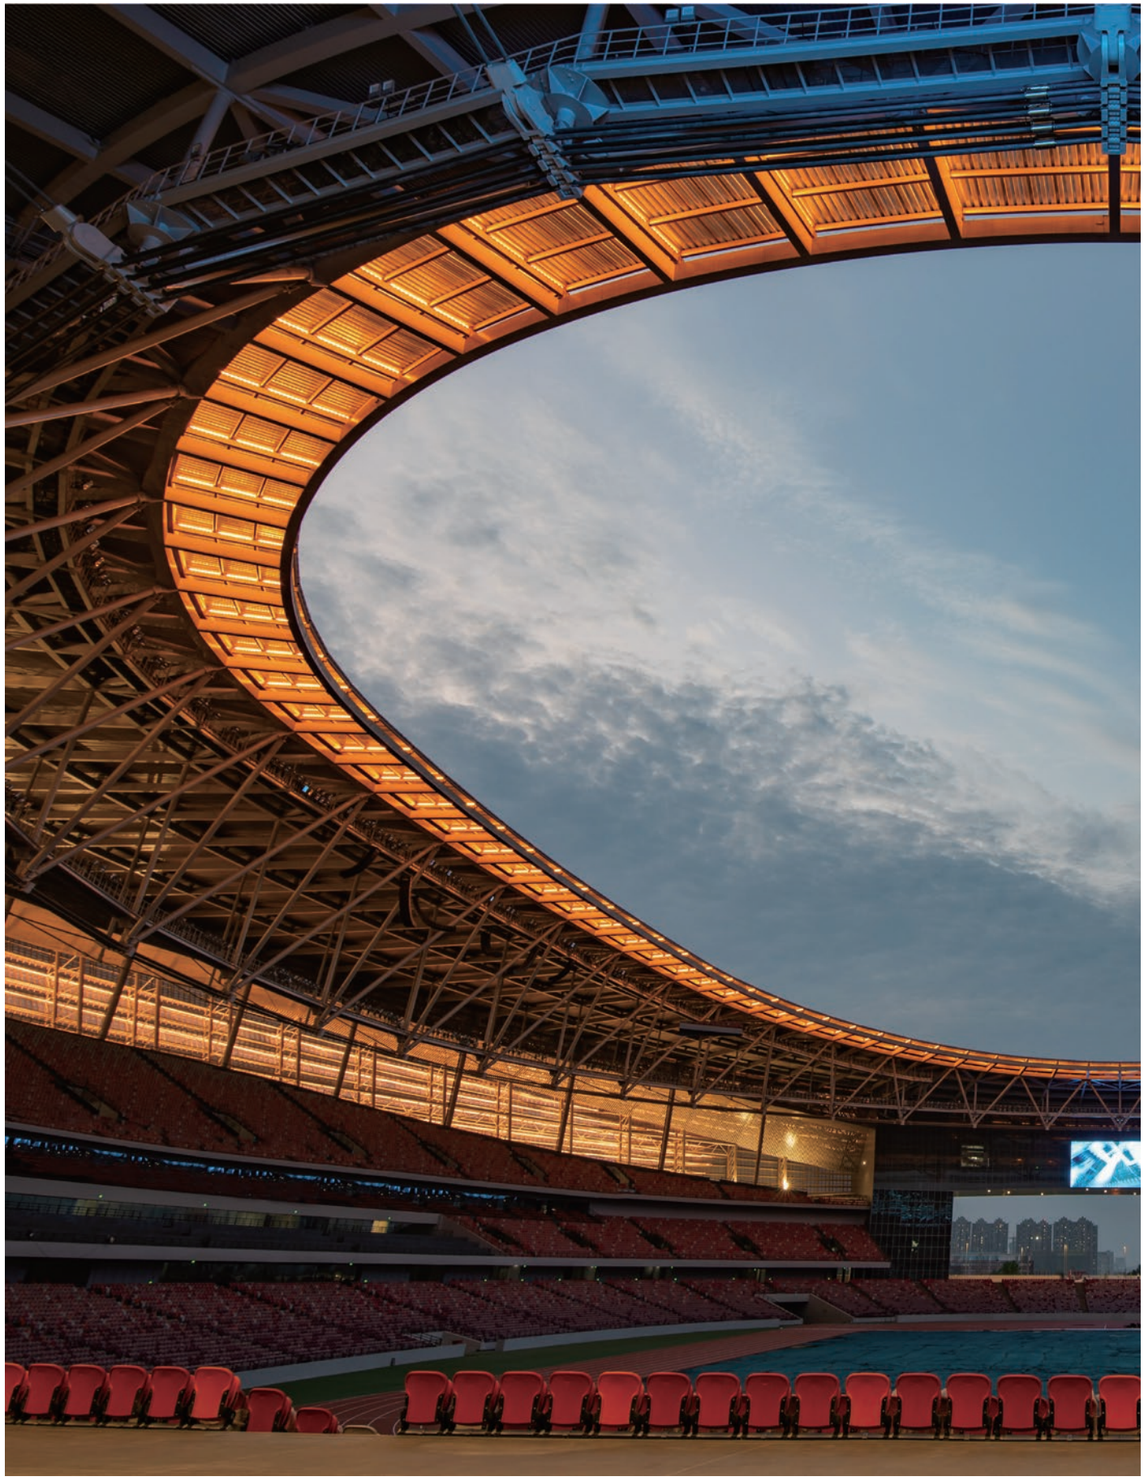

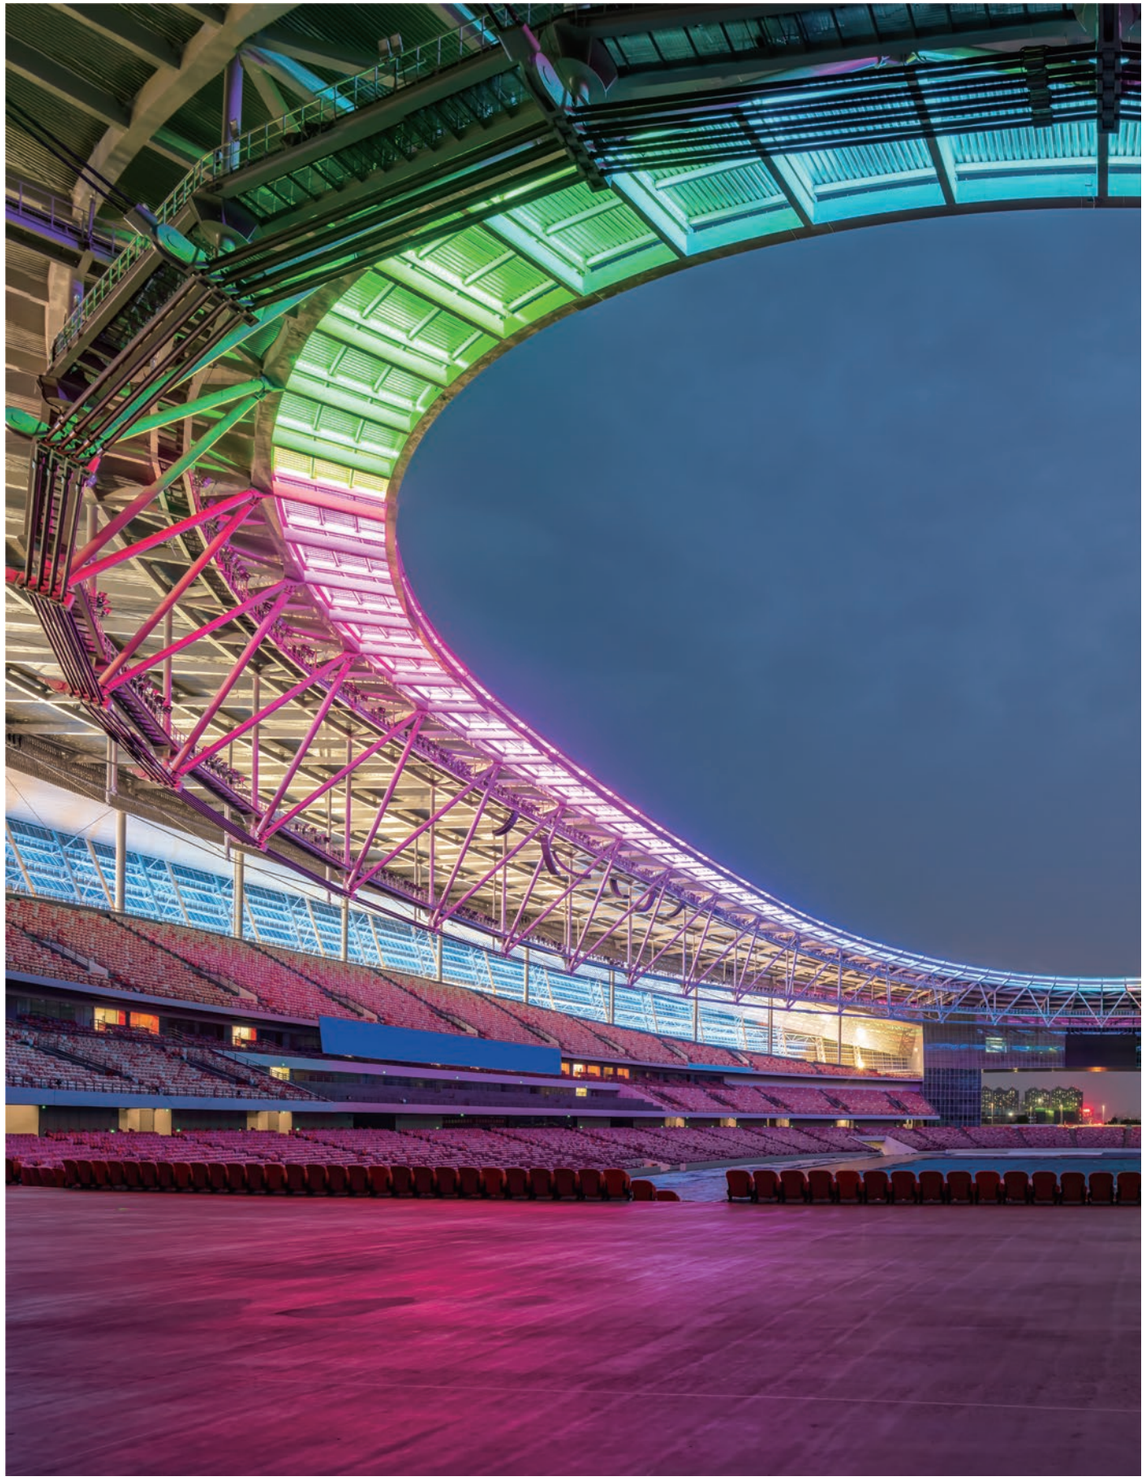




OPTICAL SYSTEM



THE OPTICAL SYSTEM FEATURES THE BEST VERSATILITY

Our innovative optical system is developed with the highest standard components and the most scientific and sensible construction to maximum the projection precision and efficiency of light deflection, we understand that the uniformity is another core value of architectural lighting applications, so we keep optomizing the optical technology to enhance uniformity for facades.

A luminaire's light distribution should complement the form of the space that it is illuminating, our products can achieve optically direct performance with high uniformity and luminous flux, and feature a various distribution options for any exterior applications. At the meantime, our luminaires are available with a wide range of optical accessories that can be used to improve visual comfort.






Spot α < 10°




Narrow α 10° - 15°

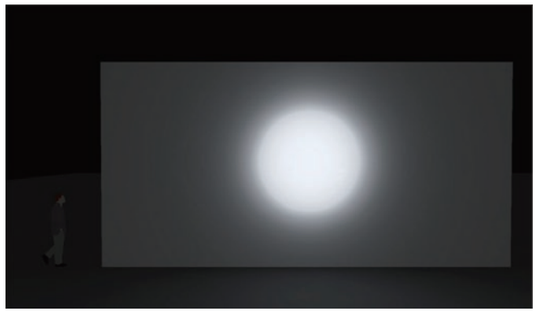

Medium α 16° - 30°




Flood α 31° - 45°

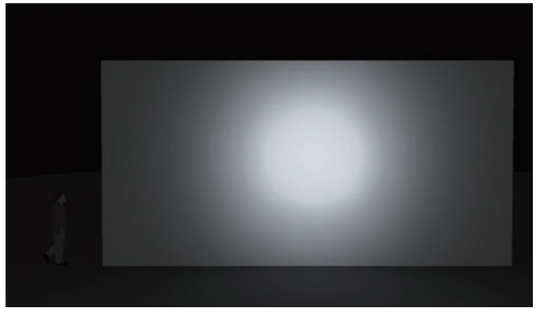

Wide flood α 46° - 60°




Elliptical oval flood

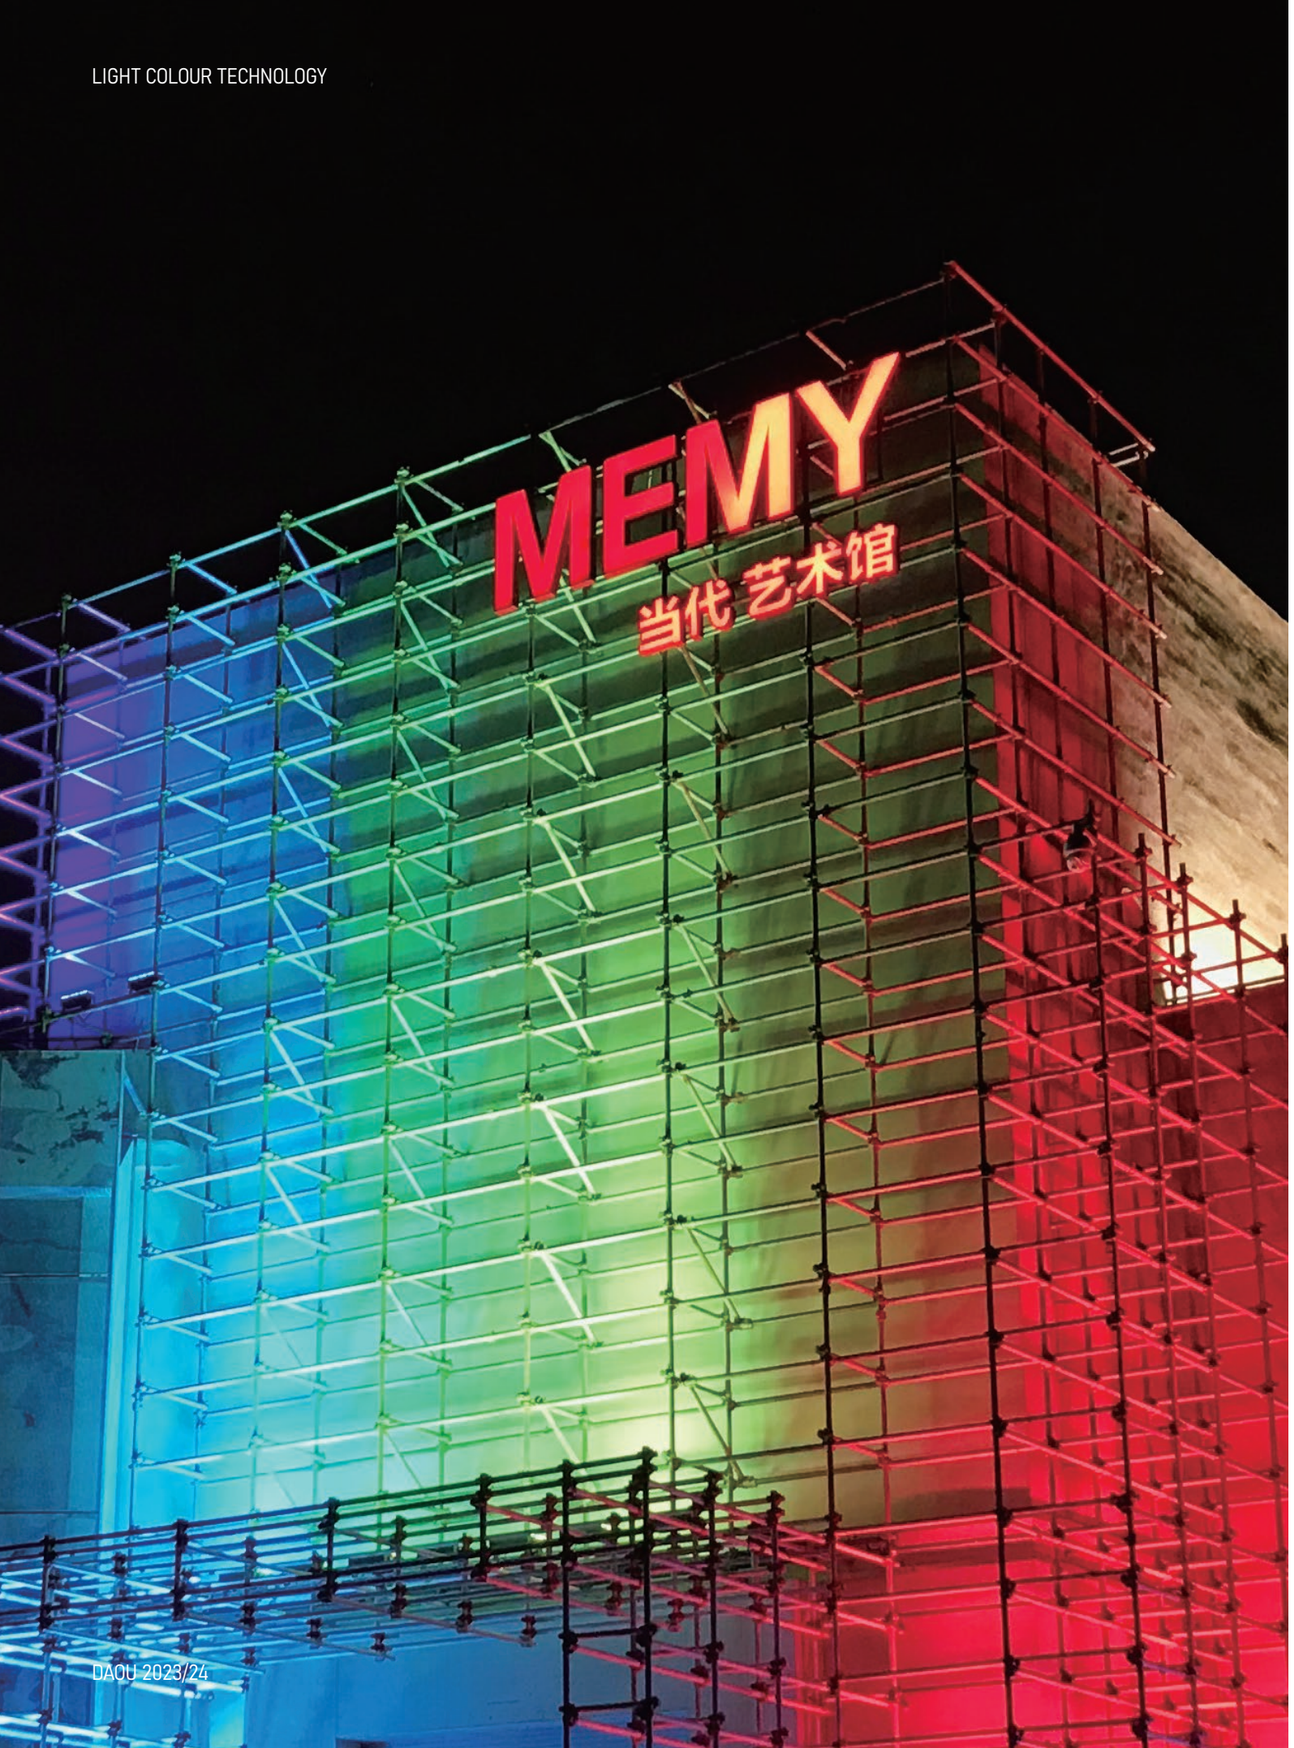


IMPROVED PERFORMANCE OF COLOUR MIXING AND UNIFORMITY

Light is used to highlight architectural details and enhance the structures and buildings in an inspirational way, right illumination turns the architectures into real landmarks. Light colour like a magic brush that lighting designers can use to create amazing effects on facades of buildings, different light colours provide buildings an unique apperance of their own at night, so higher light quality and more colour options give lighting designers the freedom to explore a wider range of concepts and design with no limitations.

Our innovative 7-in-1 LED technology makes the luminaires offer more light colours, at the meantime, it improves the illumination uniformity on facade lighting applications. By well designed LED array, 7-in-1 is used LEDs with colours Red, PC Amber, Green, Lime, Cyan, Royal Blue, White. It is ideal for outdoor lighting design required higher colour consistency and light mixing accuracy.

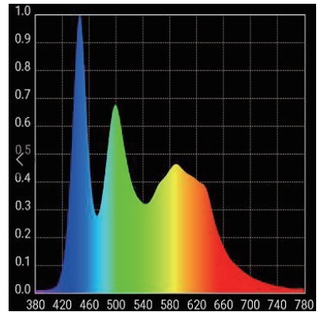

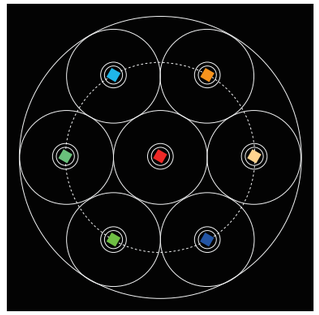

FLOODLIGHTS

TURN COMMON ARCHITECTURES, FACADES OR OUTDOOR AREAS TO UNIQUE SPACES

luminaire	lumen flux	page
HIGHLAND	2,000 - 64,000	35
CUBE 2.0	450 - 9,600	49
ARKOS	900 - 28,800	69
SERRA	450 - 4,800	95
DELTA	2,800 - 24,000	109
CUBE MINI	240 - 480	123
SERRA MINI	270 - 800	131



HIGHLAND

HIGHLAND

POWERFUL BRILLIANT PERFORMANCE



LUMINAIRE:

- Die-cast aluminum body
- Fluorocarbon powder paint resistant to corrosion and weathering
- Shock resistant tempered glass cover for protection
- Automatic self-cleaning system
- Electrically neutral thermal path to ensure performance
- Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lenses
- Symmetrical light distribution
- Ultra spot, spot, narrow, medium, flood, wide flood and elliptic optics
- Optional anti-glare accessories for improved visual comfort

LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for facade lightging
- 4-in-1 and 7-in-1 LEDs available for colour mixing versions

INSTALLATION:

- For outdoor installation on floor with bracket
- Adjustability on horizontal axis

RAL 9023






CASTLE . KORKEN . GERMANY



QUICKINFO

Floodlight 700W, 96 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0821W700	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	35,000lm
		RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512		24,500lm



QUICKINFO

Floodlight 800W, 96 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0821W800	spot 4.5° **0004** spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	64,000lm




QUICKINFO

Floodlight 800W, 96 high-power LEDs
4-IN-1 & 7-IN-1
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0821W800	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4140K** RGBCLA+3000K **7130K** RGBCLA+4000K **7140K**	DMX512	RAL9023 **01**	36,000lm 32,000lm



honeycomb **0821A1**




QUICKINFO


Floodlight 600W, 180 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0821W600	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	30,000lm
		RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512		21,000lm




QUICKINFO

Floodlight 600W, 180 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0821W600	spot 6° **0006**	2700K **2780**	ON/OFF	RAL9023 **01**	48,000lm
	narrow 12° **0012**	3000K **3080**			
	medium 20° **0020**	4000K **4080**			
	medium 30° **0030**				
	flood 45° **0045**				
	wide flood 60° **0060**				
	elliptic 10°x70° **1070**				




QUICKINFO

Floodlight 720W, 80 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0821W720	spot 8° **0008**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	32,400lm
	medium 25° **0025**				
	elliptic 10°x45° **1045**				



honeycomb **0821A1**



anti-glare visor **0821A2**






QUICKINFO

Floodlight 300W, 90 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0821W300	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	15,000lm
		RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512		10,500lm




QUICKINFO

Floodlight 300W, 90 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0821W300	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	24,000lm




QUICKINFO

Floodlight 360W, 40 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0821W360	spot 8° **0008** medium 25° **0025** elliptic 10°x45° **1045**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	16,200lm



honeycomb **0821A1**



anti-glare visor **0821A1**






QUICKINFO

Floodlight 150W, 36 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0821W150	ultra spot 2.5° **0002**	2700K **2780**	ON/OFF	RAL9023 **01**	7,500lm
		3000K **3080**			
		4000K **4080**			
		RGB+3000K **RGB30K**	DMX512		5,250lm
		RGB+4000K **RGB40K**			



QUICKINFO

Floodlight 150W, 36 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0821W150	spot 6° **0006**	2700K **2780**	ON/OFF	RAL9023 **01**	12,000lm
	narrow 12° **0012**	3000K **3080**			
	medium 20° **0020**	4000K **4080**			
	medium 30° **0030**				
	flood 45° **0045**				
	wide flood 60° **0060**				
	elliptic 10°x70° **1070**				



QUICKINFO

Floodlight 150W, 18 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0821W150	spot 8° **0008**	RGB+3000K **4130K**	DMX512	RAL9023 **01**	6,750lm
	medium 25° **0025**	RGB+4000K **4130K**			
	elliptic 10°x45° **1045**				



honeycomb **0821A1**



anti-glare visor **0821A2**






QUICKINFO

Floodlight 56W, 12 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0821W56	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	2,800lm
		RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512		1,960lm




QUICKINFO

Floodlight 56W, 12 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0821W56	spot 6° **0006**	2700K **2780**	ON/OFF	RAL9023 **01**	4,480lm
	narrow 12° **0012**	3000K **3080**			
	medium 20° **0020**	4000K **4080**			
	medium 30° **0030**				
	flood 45° **0045**				
	wide flood 60° **0060**				
	elliptic 10°x70° **1070**				




QUICKINFO

Floodlight 72W, 12 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0821W72	spot 9° **0009**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	3,240lm
	narrow 15° **0015**				
	medium 20° **0020**				
	medium 30° **0030**				
	flood 45° **0045**				
	elliptic 15°x60° **1560**				



honeycomb **0821A1**



anti-glare visor **0821A2**





CUBE 2.0

CUBE 2.0

FREEDOM WITH LIGHTING



LUMINAIRE:

- Die-cast aluminum body
- Fluorocarbon powder paint resistant to corrosion and weathering
- Shock resistant tempered glass cover for protection
- Automatic self-cleaning system
- Electrically neutral thermal path to ensure performance
- Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lenses
- Symmetrical light distribution
- Ultra spot, spot, narrow, medium, flood, wide flood and elliptic optics
- Optional anti-glare accessories for improved visual comfort

LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for facade lightging
- 4-in-1 and 7-in-1 LEDs available for colour mixing versions

INSTALLATION:

- For outdoor installation on floor, wall or ceiling with base
- Adjustability on both horizontal and vertical axes
- Optional accessories for multiple installation requirements



BUILDING THE BUND . SHANGHAI . CHINA




QUICKINFO

Floodlight 120W, 25 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0822W120	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	6,000lm
		RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512		4,200lm




QUICKINFO

Floodlight 120W, 25 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0822W120	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	9,600lm




QUICKINFO


Floodlight 150W, 24 high-power LEDs
4-IN-1 & 7-IN-1
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0822W150	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K** RGBCLA+3000K **7130K** RGBCLA+4000K **7140K**	DMX512	RAL9023 **01**	6,750lm 6,000lm




honeycomb **0822A1**

for models with optics > 30°




anti-glare visor **0822A2**






U-bracket **0822A3**






pole adapter **0822A4**

for Ø 48mm poles





pole clamp **0822A5**






QUICKINFO

Floodlight 75W, 16 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0822W75	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	3,750lm
		RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512		2,630lm




QUICKINFO

Floodlight 75W, 16 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0822W75	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	6,000lm




QUICKINFO


Floodlight 100W, 16 high-power LEDs
4-IN-1 & 7-IN-1
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0822W100	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K** RGBCLA+3000K **7130K** RGBCLA+4000K **7140K**	DMX512	RAL9023 **01**	4,500lm 4,000lm




honeycomb **0822A1**

for models with optics > 30°




anti-glare visor **0822A2**






U-bracket **0822A3**





pole adapter **0822A4**


for Ø 48mm poles





pole clamp **0822A5**


for Ø 114mm poles





pole plate **0822A6**


for Ø 67~325mm T>=4 poles





strap **0822A7**

for Ø 168~268mm trees



SOUTH RAILWAY STATION . JIAXING . CHINA




QUICKINFO

Floodlight 45W, 9 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0822W45	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	2,250lm
		RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512		1,580lm




QUICKINFO

Floodlight 45W, 9 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0822W45	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	3,600lm




QUICKINFO

Floodlight 60W, 9 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0822W60	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	2,700lm




honeycomb **0822A1**

for models with optics > 30°




anti-glare visor **0822A2**






U-bracket **0822A3**





pole adapter **0822A4**


for Ø 48mm poles





pole clamp **0822A5**


for Ø 114mm poles





pole plate **0822A6**


for Ø 67~325mm T>=4 poles






strap **0822A7**

for Ø 168~268mm trees





spike **0822A8**








QUICKINFO

Floodlight 20W, 4 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0822W20	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	1,000lm



QUICKINFO

Floodlight 20W, 4 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0822W20	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	1,600lm




QUICKINFO

Floodlight 20W, 4 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0822W20	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	900lm




honeycomb **0822A1**

for models with optics > 30°





anti-glare visor **0822A2**






U-bracket **0822A3**





pole adapter **0822A4**


for Ø 48mm poles





pole clamp **0822A5**


for Ø 114mm poles





pole plate **0822A6**


for Ø 67~325mm T>=4 poles






strap **0822A7**

for Ø 168~268mm trees





spike **0822A8**






QUICKINFO

Floodlight 10W, 1 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0822W10	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	500lm



QUICKINFO

Floodlight 10W, 1 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0822W10	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	800lm



QUICKINFO

Floodlight 10W, 1 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0822W10	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	450lm




honeycomb **0822A1**

for models with optics > 30°




anti-glare visor **0822A2**





spike **0822A8**





ARKOS

ARKOS

ENHANCE THE VALUE



LUMINAIRE:

- Die-cast aluminum body
- Fluorocarbon powder paint resistant to corrosion and weathering
- Shock resistant tempered glass cover for protection
- Automatic self-cleaning system
- Electrically neutral thermal path to ensure performance
- Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lenses
- Symmetrical light distribution
- Ultra spot, spot, narrow, medium, flood, wide flood and elliptic optics
- Optional anti-glare accessories for improved visual comfort

LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for facade lightging
- 4-in-1 and 7-in-1 LEDs available for colour mixing versions

INSTALLATION:

- For outdoor installation on floor, wall or ceiling with base
- Adjustability on both horizontal and vertical axes
- Optional accessories for multiple installation requirements

RAL 9023






QUICKINFO

Floodlight 320W, 36 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W320	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	16,000lm
		RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512		11,200lm




QUICKINFO

Floodlight 360W, 36 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W360	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	28,800lm




QUICKINFO

Floodlight 360W, 36 high-power LEDs
4-IN-1 & 7-IN-1
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W360	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K** RGBCLA+3000K **7130K** RGBCLA+4000K **7140K**	DMX512	RAL9023 **01**	16,200lm 14,400lm



honeycomb **0820A1**


for models with optics > 30°



anti-glare glass **0820A2**



U-bracket **0820A3**






QUICKINFO

Floodlight 210W, 24 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W210	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	10,500lm
		RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512		7,350lm




QUICKINFO

Floodlight 240W, 24 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W240	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	19,200lm

CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W240	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K** RGBCLA+3000K **7130K** RGBCLA+4000K **7140K**	DMX512	RAL9023 **01**	10,800lm 9,600lm



honeycomb **0820A1**


for models with optics > 30°



anti-glare glass **0820A2**



U-bracket **0820A3**






QUICKINFO

Floodlight 120W, 25 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W120	ultra spot 2.5° **0002**	2700K **2780**	ON/OFF	RAL9023 **01**	6,000lm
		3000K **3080**			
		4000K **4080**			
		RGB+3000K **RGB30K**	DMX512		4,200lm
		RGB+4000K **RGB40K**			




QUICKINFO

Floodlight 120W, 25 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W120	spot 6° **0006**	2700K **2780**	ON/OFF	RAL9023 **01**	9,600lm
	narrow 12° **0012**	3000K **3080**			
	medium 20° **0020**	4000K **4080**			
	medium 30° **0030**				
	flood 45° **0045**				
	wide flood 60° **0060**				
	elliptic 10°x70° **1070**				




QUICKINFO


Floodlight 150W, 24 high-power LEDs
4-IN-1 & 7-IN-1
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W150	spot 9° **0009**	RGB+3000K **4130K**	DMX512	RAL9023 **01**	6,750lm
	narrow 15° **0015**	RGB+4000K **4130K**			
	medium 20° **0020**	RGBCLA+3000K **7130K**			6,000lm
	medium 30° **0030**	RGBCLA+4000K **7140K**			
	flood 45° **0045**				
	elliptic 15°x60° **1560**				




honeycomb **0820A1**


for models with optics > 30°




anti-glare glass **0820A2**




U-bracket **0820A3**





pole adapter **0820A4**


for Ø 48mm poles





pole clamp **0820A5**

for Ø 114mm poles






QUICKINFO

Floodlight 75W, 16 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W75	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	3,750lm
		RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512		2,630lm




QUICKINFO

Floodlight 75W, 16 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W75	spot 6° **0006**	2700K **2780**	ON/OFF	RAL9023 **01**	6,000lm
	narrow 12° **0012**	3000K **3080**			
	medium 20° **0020**	4000K **4080**			
	medium 30° **0030**				
	flood 45° **0045**				
	wide flood 60° **0060**				
	elliptic 10°x70° **1070**				




QUICKINFO

Floodlight 100W, 16 high-power LEDs
4-IN-1 & 7-IN-1
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W100	spot 9° **0009**	RGB+3000K **4130K**	DMX512	RAL9023 **01**	4,500lm
	narrow 15° **0015**	RGB+4000K **4130K**			
	medium 20° **0020**	RGBCLA+3000K **7130K**			4,000lm
	medium 30° **0030**	RGBCLA+4000K **7140K**			
	flood 45° **0045**				
	elliptic 15°x60° **1560**				



honeycomb **0820A1**


for models with optics > 30°



anti-glare glass **0820A2**




U-bracket **0820A3**





pole adapter **0820A4**


for Ø 48mm poles





pole clamp **0820A5**


for Ø 114mm poles





pole plate **0820A6**


for Ø 67~325mm T>=4 poles





strap **0820A7**

for Ø 168~268mm trees






QUICKINFO

Floodlight 45W, 9 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W45	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	2,250lm
		RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512		1,580lm




QUICKINFO

Floodlight 45W, 9 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W45	spot 6° **0006**	2700K **2780**	ON/OFF	RAL9023 **01**	3,600lm
	narrow 12° **0012**	3000K **3080**			
	medium 20° **0020**	4000K **4080**			
	medium 30° **0030**				
	flood 45° **0045**				
	wide flood 60° **0060**				
	elliptic 10°x70° **1070**				




QUICKINFO

Floodlight 60W, 9 high-power LEDs
4-IN-1 & 7-IN-1
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W60	spot 9° **0009**	RGB+3000K **4130K**	DMX512	RAL9023 **01**	2,700lm
	narrow 15° **0015**	RGB+4000K **4130K**			
	medium 20° **0020**	RGBCLA+3000K **7130K**			2,400lm
	medium 30° **0030**	RGBCLA+4000K **7140K**			
	flood 45° **0045**				
	elliptic 15°x60° **1560**				



honeycomb **0820A1**


for models with optics > 30°



anti-glare glass **0820A2**




U-bracket **0820A3**





pole adapter **0820A4**


for Ø 48mm poles





pole clamp **0820A5**


for Ø 114mm poles





pole plate **0820A6**


for Ø 67~325mm T>=4 poles






strap **0820A7**

for Ø 168~268mm trees





spike **0820A8**





HOLIDAY INN . EUROPE




QUICKINFO

Floodlight 30W, 6 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W30	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	1,500lm




QUICKINFO

Floodlight 30W, 6 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W30	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	2,400lm




QUICKINFO

Floodlight 30W, 6 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W30	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** flood 45° **0045** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	1,350lm



honeycomb **0820A1**


for models with optics > 30°



anti-glare glass **0820A2**




U-bracket **0820A3**





pole adapter **0820A4**


for Ø 48mm poles





pole clamp **0820A5**


for Ø 114mm poles





pole plate **0820A6**


for Ø 67~325mm T>=4 poles






strap **0820A7**

for Ø 168~268mm trees





spike **0820A8**






QUICKINFO

Floodlight 20W, 4 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W20	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	1,000lm




QUICKINFO

Floodlight 20W, 4 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W20	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	1,600lm




QUICKINFO

Floodlight 20W, 4 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

CE IP66 IK08

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0820W20	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** flood 45° **0045** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	900lm



honeycomb **0820A1**


for models with optics > 30°



anti-glare glass **0820A2**




U-bracket **0820A3**





adapter **0820A4**

for Ø 48mm poles





clamp **0820A5**

for Ø 114mm poles







plate **0820A6**


for Ø 67~325mm T>=4 poles






strap **0820A7**

for Ø 168~268mm trees





spike **0820A8**





SERRA

SERRA

PERSONALITY FOR SPACE



LUMINAIRE:

- Die-cast aluminum body
- Fluorocarbon powder paint resistant to corrosion and weathering
- Shock resistant tempered glass cover for protection
- Automatic self-cleaning system
- Electrically neutral thermal path to ensure performance
- Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lenses
- Symmetrical light distribution
- Ultra spot, spot, narrow, medium, flood, wide flood and elliptic optics
- Optional anti-glare accessories for improved visual comfort

LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for facade lightging
- 4-in-1 LEDs available for colour mixing versions

INSTALLATION:

- For outdoor installation on floor, wall or ceiling with base
- Adjustability on both horizontal and vertical axes
- Optional accessories for multiple installation requirements

RAL 9023



AEGEAN SHOPPING CENTER . JAIXING . CHINA




QUICKINFO

Floodlight 45W, 5 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0811W45	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	2,250lm




QUICKINFO

Floodlight 60W, 5 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0811W60	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	4,800lm




QUICKINFO

Floodlight 60W, 5 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0811W60	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** flood 45° **0045** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	2,700lm



honeycomb **0811A1**


for models with optics > 30°



anti-glare glass **0811A2**




U-bracket **0811A3**





pole adapter **0811A4**


for Ø 48mm poles





pole clamp **0811A5**


for Ø 114mm poles





pole plate **0811A6**


for Ø 67~325mm T>=4 poles






strap **0811A7**

for Ø 168~268mm trees





spike **0811A8**






QUICKINFO

Floodlight 30W, 3 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0811W30	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	1,500lm



QUICKINFO

Floodlight 30W, 3 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0811W30	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	2,400lm



QUICKINFO

Floodlight 30W, 3 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0811W30	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** flood 45° **0045** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	1,350lm



honeycomb **0811A1**


for models with optics > 30°



anti-glare glass **0811A2**




U-bracket **0811A3**





pole adapter **0811A4**


for Ø 48mm poles





pole clamp **0811A5**


for Ø 114mm poles





pole plate **0811A6**


for Ø 67~325mm T>=4 poles






strap **0811A7**

for Ø 168~268mm trees





spike **0811A8**






QUICKINFO

Floodlight 10W, 1 high-power LED
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0811W10	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	500lm



QUICKINFO

Floodlight 10W, 1 high-power LED
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0811W10	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x45° **1045**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	800lm



QUICKINFO

Floodlight 10W, 1 high-power LED
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0811W10	spot 8° **0008** medium 25° **0025** elliptic 10°x45° **1045**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	450lm



honeycomb **0811A1**


for models with optics > 30°



anti-glare glass **0811A2**




U-bracket **0811A3**





spike **0811A8**





DELTA

DELTA

THE LANDSCAPE MAKER



LUMINAIRE:

- Die-cast aluminum body
- Fluorocarbon powder paint resistant to corrosion and weathering
- Shock resistant tempered glass cover for protection
- Automatic self-cleaning system
- Electrically neutral thermal path to ensure performance
- Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lenses
- Symmetrical light distribution
- Ultra spot, spot, narrow, medium, flood, wide flood and elliptic optics
- Optional anti-glare accessories for improved visual comfort

LIGHT COLOUR MANAGEMENT:


- High uniformity and consistency for facade lightging
- 4-in-1 LEDs available for colour mixing versions

INSTALLATION:

- For outdoor installation on floor with bracket
- Adjustability on horizontal axis

RAL 9023



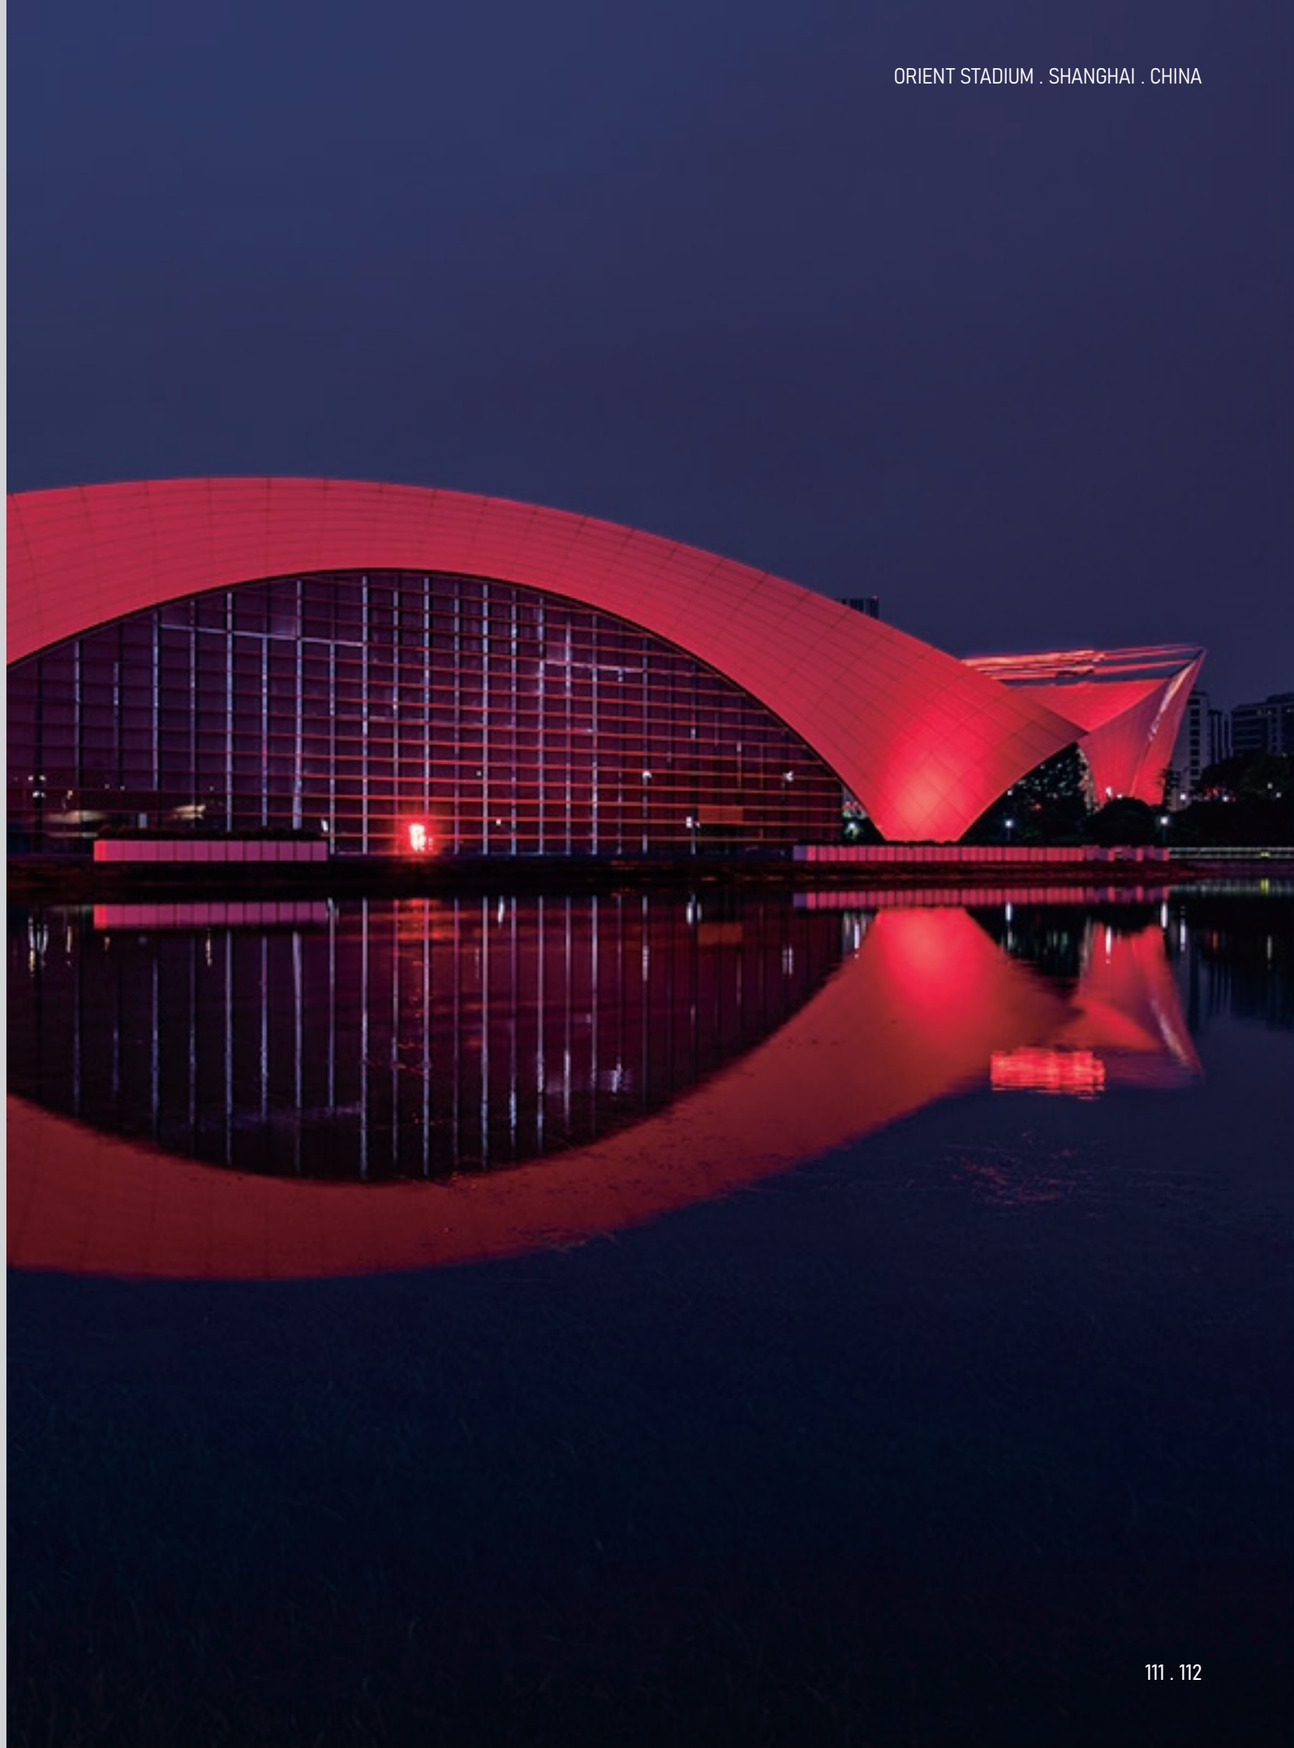

ORIENT STADIUM . SHANGHAI . CHINA




QUICKINFO

Floodlight 300W, 48 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0819W300	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	15,000lm
		RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512		10,500lm




QUICKINFO

Floodlight 300W, 48 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0819W300	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	24,000lm




QUICKINFO


Floodlight 300W, 48 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08


DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0819W300	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** flood 45° **0045** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	13,500lm



honeycomb **0819A1**



anti-glare visor **0819A2**






QUICKINFO

Floodlight 240W, 36 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0819W240	ultra spot 2.5° **0002**	2700K **2780**	ON/OFF	RAL9023 **01**	12,000lm
		3000K **3080**			
		4000K **4080**			
		RGB+3000K **RGB30K**	DMX512		8,400lm
		RGB+4000K **RGB40K**			




QUICKINFO

Floodlight 240W, 36 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0819W240	spot 6° **0006**	2700K **2780**	ON/OFF	RAL9023 **01**	19,200lm
	narrow 12° **0012**	3000K **3080**			
	medium 20° **0020**	4000K **4080**			
	medium 30° **0030**				
	flood 45° **0045**				
	wide flood 60° **0060**				
	elliptic 10°x70° **1070**				




QUICKINFO

Floodlight 240W, 36 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08


DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0819W240	spot 9° **0009**	RGB+3000K **4130K**	DMX512	RAL9023 **01**	10,800lm
	narrow 15° **0015**	RGB+4000K **4130K**			
	medium 20° **0020**				
	medium 30° **0030**				
	flood 45° **0045**				
	elliptic 15°x60° **1560**				



honeycomb **0819A1**



anti-glare visor **0819A2**





QUICKINFO

Floodlight 160W, 24 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0819W160	ultra spot 2.5° **0002**	2700K **2780**	ON/OFF	RAL9023 **01**	8,000lm
		3000K **3080**			
		4000K **4080**			
		RGB+3000K **RGB30K**	DMX512		5,600lm
		RGB+4000K **RGB40K**			



QUICKINFO

Floodlight 160W, 24 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0819W160	spot 6° **0006**	2700K **2780**	ON/OFF	RAL9023 **01**	12,800lm
	narrow 12° **0012**	3000K **3080**			
	medium 20° **0020**	4000K **4080**			
	medium 30° **0030**				
	flood 45° **0045**				
	wide flood 60° **0060**				
	elliptic 10°x70° **1070**				



QUICKINFO


Floodlight 160W, 24 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08


DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0819W160	spot 9° **0009**	RGB+3000K **4130K**	DMX512	RAL9023 **01**	7,200lm
	narrow 15° **0015**	RGB+4000K **4130K**			
	medium 20° **0020**				
	medium 30° **0030**				
	flood 45° **0045**				
	elliptic 15°x60° **1560**				



honeycomb **0819A1**



anti-glare visor **0819A2**





QUICKINFO

Floodlight 120W, 18 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0819W120	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	6,000lm
		RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512		4,200lm



QUICKINFO

Floodlight 120W, 18 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0819W120	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	9,600lm



QUICKINFO

Floodlight 120W, 18 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08


DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0819W120	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** flood 45° **0045** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	5,400lm



honeycomb **0819A1**



anti-glare visor **0819A2**





QUICKINFO

Floodlight 80W, 12 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0819W80	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	4,000lm
		RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512		2,800lm



QUICKINFO

Floodlight 80W, 12 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0819W80	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	6,400lm



QUICKINFO


Floodlight 80W, 12 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK08


DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0819W80	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** flood 45° **0045** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	3,600lm



honeycomb **0819A1**



anti-glare visor **0819A2**



CUBE MINI





CUBE MINI

HIGHLIGHT ARCHITECTURAL DETAILS

LUMINAIRE:

- Die-cast aluminum body
- Fluorocarbon powder paint resistant to corrosion and weathering
- Shock resistant tempered glass cover for protection
- Automatic self-cleaning system
- Electrically neutral thermal path to ensure performance
- Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lens
- Symmetrical light distribution
- Spot, narrow, medium, flood, wide flood and elliptic optics
- Optional anti-glare accessories for improved visual comfort

LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for facade lightging
- 4-in-1 LEDs available for colour mixing versions

INSTALLATION:

- For outdoor installation on floor, wall or ceiling with bracket
- Adjustability on both horizontal and vertical axes
- Optional accessories for multiple insttllation requirements

RAL 9023








QUICKINFO

Floodlight 6W, 1 high-power LED
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0814W6	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** wide flood 60° **0060** elliptic 15°x30° **1530** elliptic 10°x60° **1060**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	480lm



QUICKINFO

Floodlight 10W, 1 high-power LED
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0814W6	medium 20° **0020** flood 45° **0045** wide flood 60° **0060** elliptic 15°x25° **1525** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	270lm




honeycomb **0814A1**

for models with optics > 30°




anti-glare visor **0814A2**





spike **0814A3**






QUICKINFO

Floodlight 3W, 1 high-power LED
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0814W3	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 25°x45° **2545**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	240lm




honeycomb **0814A1**

for models with optics > 30°




anti-glare visor **0814A2**





spike **0814A3**



SERRA MINI





CUBE MINI

HIGHLIGHT ARCHITECTURAL DETAILS

LUMINAIRE:

- Die-cast aluminum body
- Fluorocarbon powder paint resistant to corrosion and weathering
- Shock resistant tempered glass cover for protection
- Automatic self-cleaning system
- Electrically neutral thermal path to ensure performance
- Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lens
- Symmetrical light distribution
- Ultra spot, spot, narrow, medium, flood, wide flood and elliptic optics
- Optional anti-glare accessories for improved visual comfort

LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for facade lightging
- 4-in-1 LEDs available for colour mixing versions

INSTALLATION:

- For outdoor installation on floor, wall or ceiling with base
- Adjustability on both horizontal and vertical axes
- Optional accessories for multiple instllation requirements

RAL 9023








QUICKINFO

Floodlight 10W, 1 high-power LED
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0823W10	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	500lm



QUICKINFO

Floodlight 10W, 1 high-power LED
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0823W10	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	800lm



QUICKINFO

Floodlight 10W, 1 high-power LED
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0823W10	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** flood 45° **0045** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	450lm



honeycomb **0823A1**

for models with optics > 30°




anti-glare glass **0823A2**




strap **0823A3**

for Ø 60~200mm trees





spike **0823A4**






QUICKINFO

Floodlight 6W, 1 high-power LED
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0823W6	narrow 12° **0012** medium 20° **0020** medium 30° **0030** wide flood 60° **0060** elliptic 15°x30° **1530** elliptic 10°x60° **1060**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	480lm



QUICKINFO

Floodlight 6W, 1 high-power LED
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0823W6	medium 20° **0020** flood 45° **0045** wide flood 60° **0060** elliptic 15°x25° **1525** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	270lm



honeycomb **0823A1**

for models with optics > 30°




anti-glare glass **0823A2**




strap **0823A3**

for Ø 60~200mm trees





spike **0823A4**






QUICKINFO

Floodlight 3W, 1 high-power LED
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
0823W3	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 25°x45° **2545**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	240lm

honeycomb **0823A1**

for models with optics > 30°




anti-glare glass **0823A2**



strap **0823A3**


for Ø 60~200mm trees





spike **0823A4**





LINEAR SYSTEMS

BRING ARCHITECTURAL DETAILS ON BUILDINGS TO LIFE WITH LIGHT

luminaire	lumen flux	page
YORK L	2,700 - 16,000	143
YORK M	1,300 - 8,000	151
YORK S	360 - 3,800	163
UNI-LINE	650 - 1,100	181





YORK L

YORK L

RELY ON REACH



LUMINAIRE:

· Anodized extruded aluminum body resistant to weathering
· Different standard lengths and customized lengths are available
· Shock resistant tempered glass cover for protection
· Automatic self-cleaning system
· Electrically neutral thermal path to ensure performance
· Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

· Polycarbonate UV-resistant lenses
· Symmetrical light distribution
· Ultra spot, spot, narrow, medium, flood, wide flood and elliptic optics
· Optional anti-glare accessories for improved visual comfort

LIGHT COLOUR MANAGEMENT:

· High uniformity and consistency for facade lightging
· 4-in-1 and 7-in-1 LEDs available for colour mixing versions

INSTALLATION:

· For outdoor installation on floor with bracket
· Adjustability on horizontal axis

ALU






VALERE BASILICA . SION . SWITZERLAND



QUICKINFO

Wallwasher 200W, 24 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2508W200	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	10,000lm



QUICKINFO

Wallwasher 200W, 24 high-power LEDs
4-IN-1 & 7-IN-1
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2508W200	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4140K** RGBCLA+3000K **7130K** RGBCLA+4000K **7140K**	DMX512	aluminum **01**	9,000lm 8,000lm



QUICKINFO

Wallwasher 200W, 24 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2508W200	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 5°x20° **0520** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	16,000lm



QUICKINFO

Wallwasher 100W, 12 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2508W100(0.5)	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 5°x20° **0520** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	8,000lm




QUICKINFO

Wallwasher 100W, 12 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK07

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2508W100(0.5)	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	4,500lm




QUICKINFO

Wallwasher 60W, 8 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK07

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2508W60(0.3)	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 5°x20° **0520** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	4,800lm




QUICKINFO


Wallwasher 60W, 8 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK07


DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2508W60(0.3)	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	2,700lm




honeycomb **2508A1**



anti-glare visor **2508A2**



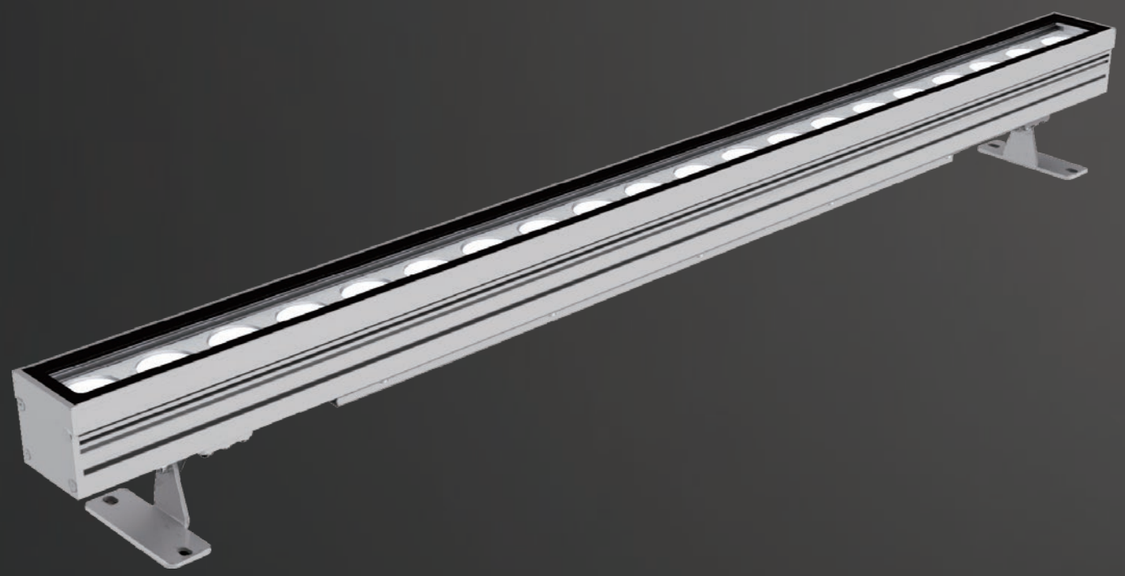

YORK M

YORK M

ENHANCE THE FACADES



LUMINAIRE:

· Anodized extruded aluminum body resistant to weathering
· Different standard lengths and customized lengths on request
· Shock resistant tempered glass cover for protection
· Automatic self-cleaning system
· Electrically neutral thermal path to ensure performance
· Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

· Polycarbonate UV-resistant lenses
· Symmetrical light distribution
· Ultra spot, spot, narrow, medium, wide flood and elliptic optics
· Optional anti-glare accessories for improved visual comfort


LIGHT COLOUR MANAGEMENT:

· High uniformity and consistency for facade lightging
· 4-in-1 and 7-in-1 LEDs available for colour mixing versions

INSTALLATION:

· For outdoor installation on floor, wall or ceiling with bracket
· Adjustability on horizontal axis

ALU






MODERN HOTEL . EUROPE



QUICKINFO

Wallwasher 100W, 20 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2504W100	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	5,000lm

QUICKINFO

Wallwasher 100W, 20 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2504W100	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** wide flood 60° **0060** elliptic 5°x20° **0520** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	8,000lm



QUICKINFO

Wallwasher 100W, 20 high-power LEDs
4-IN-1 & 7-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2504W100	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4140K** RGBCLA+3000K **7130K** RGBCLA+4000K **7140K**	DMX512	aluminum **01**	4,500lm 4,000lm



QUICKINFO

Wallwasher 72W, 20 high-power LEDs
ULTRA SPOT
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2504W72	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	3,600lm




QUICKINFO

Wallwasher 72W, 20 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK07

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2504W72	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** wide flood 60° **0060** elliptic 5°x20° **0520** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	5,760lm



QUICKINFO

Wallwasher 72W, 20 high-power LEDs
4-IN-1 & 7-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

CE IP66 IK07

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2504W72	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4140K** RGBCLA+3000K **7130K** RGBCLA+4000K **7140K**	DMX512	aluminum **01**	3,240lm 2,880lm




QUICKINFO

Wallwasher 50W, 10 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK07

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2504W50(0.5)	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** wide flood 60° **0060** elliptic 5°x20° **0520** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	4,000lm



QUICKINFO

Wallwasher 50W, 10 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

CE IP66 IK07

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2504W50(0.5)	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	2,250lm




QUICKINFO

Wallwasher 30W, 6 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK07

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2504W30(0.3)	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** wide flood 60° **0060** elliptic 5°x20° **0520** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	2,400lm




QUICKINFO

Wallwasher 30W, 6 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

CE IP66 IK07


DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2504W30(0.3)	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	1,350lm




honeycomb **2504A1**



anti-glare visor **2504A2**





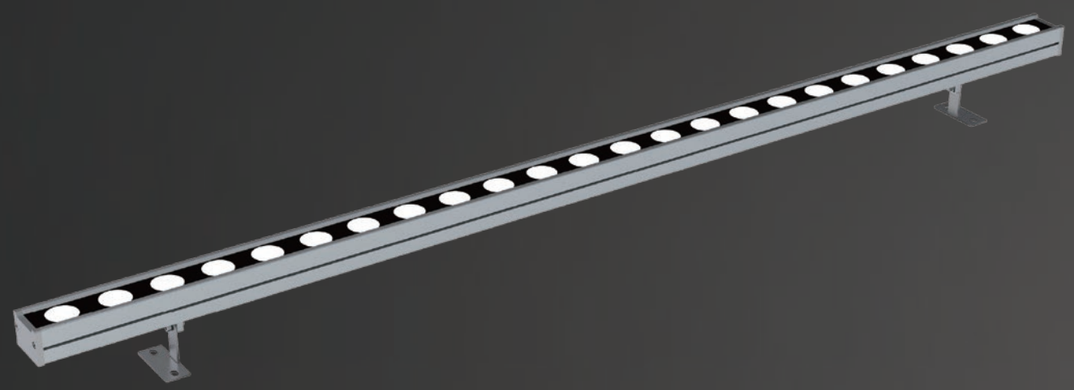

YORK S

YORK S

HIGHLIGHT THE EXTERIORS



LUMINAIRE:

- Anodized extruded aluminum body resistant to weathering
- Different standard lengths and customized lengths on request
- Shock resistant tempered glass cover for protection
- Automatic self-cleaning system
- Electrically neutral thermal path to ensure performance
- Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lenses
- Symmetrical light distribution
- Medium, flood, wide flood and elliptic optics
- Optional anti-glare accessories for improved visual comfort

LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for facade lightging
- 4-in-1 and LEDs available for colour mixing versions

INSTALLATION:

- For outdoor installation on floor, wall or ceiling with bracket
- Adjustability on horizontal axis

ALU






NANGUANXIANG . HAINING . CHINA



QUICKINFO

Wallwasher 48W, 36 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2507W48	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 20°x40° **2040** elliptic 18°x50° **1850**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	3,840lm



QUICKINFO

Wallwasher 48W, 24 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2507W48	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 25°x45° **2545**	RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	2,160lm



QUICKINFO

Wallwasher 36W, 36 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2507W36	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 20°x40° **2040** elliptic 18°x50° **1850**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	2,880lm



QUICKINFO

Wallwasher 36W, 18 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2507W36	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 25°x45° **2545**	RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	1,620lm



QUICKINFO

Wallwasher 24W, 18 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2507W24(0.5)	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 20°x40° **2040** elliptic 18°x50° **1850**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	1,920lm



QUICKINFO

Wallwasher 18W, 18 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2507W18(0.5)	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 20°x40° **2040** elliptic 18°x50° **1850**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	1,440lm



QUICKINFO

Wallwasher 24W, 12 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2507W24(0.5)	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 25°x45° **2545**	RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	1,080lm



QUICKINFO

Wallwasher 18W, 9 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2507W18(0.5)	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 25°x45° **2545**	RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	810lm



QUICKINFO

Wallwasher 12W, 9 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2507W12(0.3)	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 20°x40° **2040** elliptic 18°x50° **1850**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	960lm



QUICKINFO

Wallwasher 12W, 6 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately


DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2507W12(0.3)	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 25°x45° **2545**	RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	540lm



honeycomb **2507A1**



anti-glare visor **2507A2**







QUICKINFO

Wallwasher 24W, 24 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2506W24	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 20°x40° **2040** elliptic 18°x50° **1850**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	1,920lm



QUICKINFO

Wallwasher 24W, 18 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2506W24	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 25°x45° **2545**	RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	1,080lm



QUICKINFO

Wallwasher 18W, 18 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2506W18	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 20°x40° **2040** elliptic 18°x50° **1850**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	1,440lm



QUICKINFO

Wallwasher 18W, 12 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2504W18	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 25°x45° **2545**	RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	810lm



QUICKINFO

Wallwasher 12W, 12 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2506W12(0.5)	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 20°x40° **2040** elliptic 18°x50° **1850**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	960lm



QUICKINFO

Wallwasher 9W, 9 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2506W9(0.5)	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 20°x40° **2040** elliptic 18°x50° **1850**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	720lm



QUICKINFO

Wallwasher 12W, 9 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2506W12(0.5)	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 25°x45° **2545**	RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	540lm



QUICKINFO

Wallwasher 9W, 6 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2506W9(0.5)	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 25°x45° **2545**	RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	405lm



QUICKINFO

Wallwasher 6W, 6 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2506W6(0.3)	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 20°x40° **2040** elliptic 18°x50° **1850**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	480lm



QUICKINFO

Wallwasher 8W, 6 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately


DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2506W8(0.3)	medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 25°x45° **2545**	RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	360lm




honeycomb **2506A1**



anti-glare visor **2506A2**




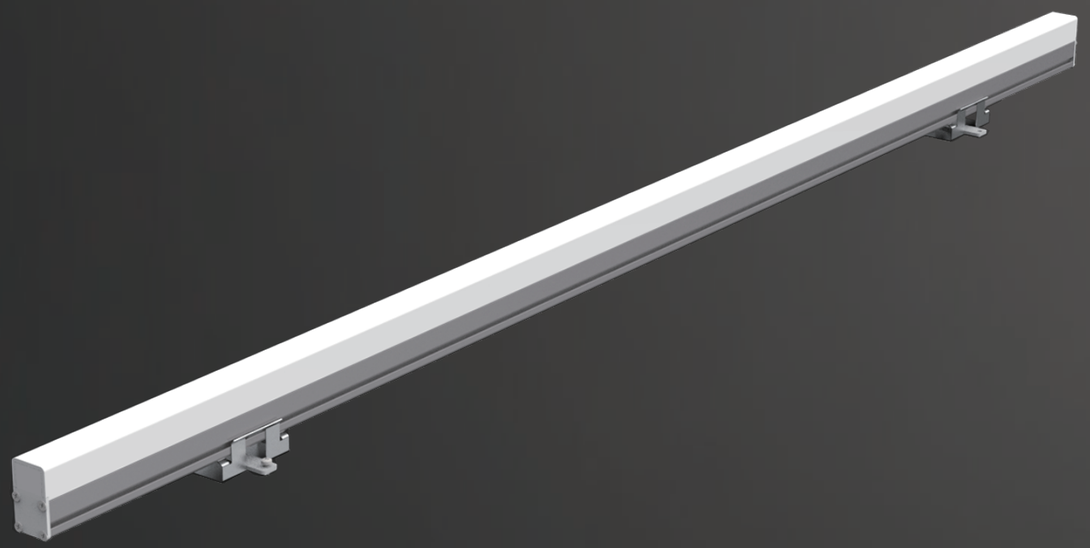

UNI-LINE

UN-LINE

SEAMLESS CONTOURING LIGHTING

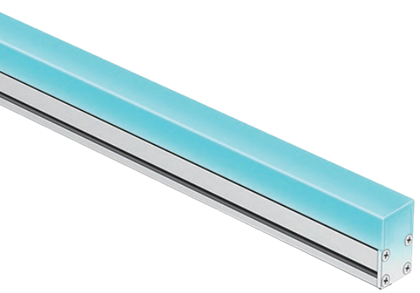

LUMINAIRE:

- Anodized extruded aluminum body resistant to weathering
- Different standard lengths and customized lengths on request
- Automatic self-cleaning system
- Electrically neutral thermal path to ensure performance
- Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

- Polycarbonate UV-resistant diffuser
- Symmetrical light distribution
- Direct-view optics

LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for facade lightging
- 3-in-1 and 4-in-1 and LEDs available for colour mixing versions

INSTALLATION:

- For outdoor installation on floor, wall or ceiling with bracket

ALU



BOOKSHOP . KAIFENG . CHINA



QUICKINFO

Linear lighting FLAT diffuser 15W, 60 LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2607W15	wide flood 120° **0120**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	1,100lm

QUICKINFO

Linear lighting FLAT diffuser 15W, 60 LEDs
3-IN-1 & 4-IN-1 (10 pixels per meter)
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2607W15	wide flood 120° **0120**	RGB **31RGB** RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	600lm 670lm



QUICKINFO

Linear lighting DOME diffuser 15W, 60 LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2608W15	wide flood 120° **0120**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	aluminum **01**	1,100lm

QUICKINFO

Linear lighting DOME diffuser 15W, 60 LEDs
3-IN-1 & 4-IN-1 (10 pixels per meter)
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2608W15	wide flood 120° **0120**	RGB **31RGB** RGB+3000K **4130K** RGB+4000K **4140K**	DMX512	aluminum **01**	600lm 670lm

GROUND LUMINAIRES

CREATE LUMINOUR PATHS AND ENHANCE ARCHITECTURAL DETAILS

luminaire	lumen flux	page
SONAX SQUARE	1,400 - 9,000	189
SONAX	400 - 6,000	199
DAN 2.0	480 - 7,500	215
ARC-SIDE	240 - 600	235
GOCCIA	1,400 - 9,000	243

SONAX SQUARE





SONAX SQUARE

BRING OUT ARCHITECTURES

LUMINAIRE:

- Die-cast aluminum body and aluminum recessed box
- Stainless steel frame
- Shock resistant tempered glass cover for protection
- Can be walked over and driven over at maximum speed 20 km/h
- Electrically neutral thermal path to ensure performance
- Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lenses
- Symmetrical light distribution
- Ultra spot, spot, narrow, medium, flood, wide flood and elliptic optics
- Built-in anti-glare grille for improved visual comfort
- Directional optical system -5° ~ +15°

LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for facade lightging
- 4-in-1 LEDs available for colour mixing versions

INSTALLATION:

- For outdoor installation with ground recessed box
- Anti-slip glass as optional accessory for improved safety

SS








QUICKINFO

Inground 120W, 16 high-power LEDs
ULTRA SPOT
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1918W120	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	5,400lm




QUICKINFO

Inground 120W, 16 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1918W120	spot 5° **0005** spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	9,000lm




QUICKINFO


Inground 150W, 16 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1918W150	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	6,000lm



anti-slip glass **1918A1**




QUICKINFO

Inground 80W, 9 high-power LEDs
ULTRA SPOT
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1918W80	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	3,600lm




QUICKINFO

Inground 80W, 9 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1918W80	spot 5° **0005** spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	6,000lm




QUICKINFO

Inground 90W, 9 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1918W90	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	3,600lm



anti-slip glass **1918A1**




QUICKINFO

Inground 30W, 4 high-power LEDs
ULTRA SPOT
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1918W30	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	1,350lm

QUICKINFO

Inground 30W, 4 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1918W30	spot 5° **0005** spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	2,250lm




QUICKINFO

Inground 40W, 4 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1918W40	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	1,600lm



anti-slip glass **1918A1**

SONAX





LUMINAIRE:

- Die-cast aluminum body and aluminum recessed box
- Stainless steel frame
- Shock resistant tempered glass cover for protection
- Can be walked over and driven over at maximum speed 20 km/h
- Electrically neutral thermal path to ensure performance
- Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lenses
- Symmetrical light distribution
- Ultra spot, spot, narrow, medium, flood, wide flood and elliptic optics
- Built-in anti-glare grille for improved visual comfort
- Directional optical system -5° ~ +15°

LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for facade lightging
- 4-in-1 LEDs available for colour mixing versions

INSTALLATION:

- For outdoor installation with ground recessed box
- Anti-slip glass as optional accessory for improved safety


SS



SONAX

MAKE LANDSCAPE NEW






QUICKINFO

Inground 80W, 9 high-power LEDs
ULTRA SPOT
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1914W80	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	3,600lm




QUICKINFO

Inground 80W, 9 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1914W80	spot 5° **0005** spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	6,000lm



QUICKINFO

Inground 80W, 9 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1914W90	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	3,600lm




honeycomb **1914A1**

for models with optics > 30°




anti-slip glass **1914A2**



QUICKINFO

Inground 50W, 6 high-power LEDs
ULTRA SPOT
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1914W50	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	2,250lm


QUICKINFO

Inground 50W, 6 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1914W50	spot 5° **0005** spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	3,750lm



QUICKINFO

Inground 60W, 6 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1914W60	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	2,400lm



honeycomb **1914A1**

for models with optics > 30°




anti-slip glass **1914A2**



QUICKINFO

Inground 30W, 4 high-power LEDs
ULTRA SPOT
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1914W30	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	1,350lm


QUICKINFO

Inground 30W, 4 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1914W30	spot 5° **0005** spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	2,250lm



QUICKINFO

Inground 40W, 4 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1914W40	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	1,600lm



honeycomb **1914A1**

for models with optics > 30°




anti-slip glass **1914A2**



QUICKINFO

Inground 20W, 2 high-power LEDs
ULTRA SPOT
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1914W20	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	900lm



QUICKINFO

Inground 20W, 2 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1914W20	spot 5° **0005** spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	1,500lm



QUICKINFO

Inground 20W, 2 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1914W20	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	800lm



honeycomb **1914A1**

for models with optics > 30°




anti-slip glass **1914A2**



QUICKINFO

Inground 10W, 1 high-power LED
ULTRA SPOT
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1914W10	ultra spot 2° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	450lm



QUICKINFO

Inground 10W, 1 high-power LED
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1914W10	spot 5° **0005** spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	750lm



QUICKINFO

Inground 10W, 1 high-power LED
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1914W10	spot 8° **0008** narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	400lm




honeycomb **1914A1**

for models with optics > 30°



anti-slip glass **1914A2**

DAN 2.0

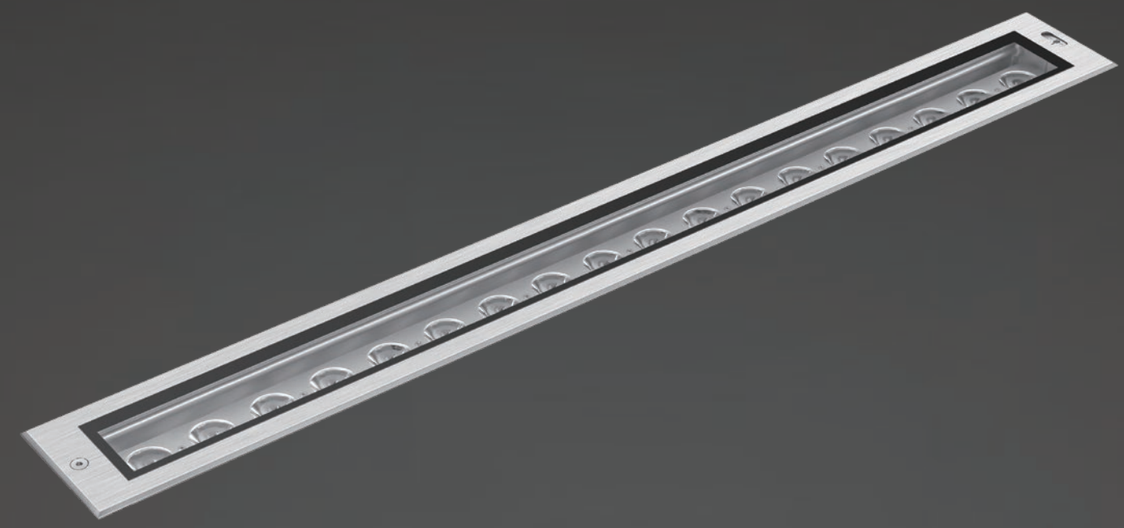

DAN 2.0

ACCENTUATE SURFACE TEXTURE

LUMINAIRE:

- Die-cast aluminum body and aluminum recessed box
- Stainless steel frame
- Shock resistant tempered glass cover for protection
- Can be walked over and driven over at maximum speed 20 km/h
- Electrically neutral thermal path to ensure performance
- Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lenses
- Symmetrical light distribution
- Ultra spot, spot, narrow, medium, flood, wide flood and elliptic optics
- Optional anti-glare accessory for improved visual comfort
- Directional optical system -5° ~ +15°


LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for facade lightging
- 4-in-1 LEDs available for colour mixing versions

INSTALLATION:

- For outdoor installation with ground recessed box
- Anti-slip glass as optional accessory for improved safety

SS







QUICKINFO

Inground 100W, 20 high-power LEDs
ULTRA SPOT
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1913W100	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	4,500lm



QUICKINFO

Inground 100W, 20 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1913W100	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	7,500lm



QUICKINFO

Inground 100W, 20 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1913W100	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** flood 45° **0045** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	4,000lm



QUICKINFO

Inground 60W, 20 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1913W60	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	4,500lm




QUICKINFO

Inground 60W, 20 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1913W60	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** flood 45° **0045** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	2,400lm



QUICKINFO

Inground 50W, 10 high-power LEDs
ULTRA SPOT
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1913W50(0.5)	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	2,250lm



QUICKINFO

Inground 50W, 10 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1913W50(0.5)	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	3,750lm



QUICKINFO

Inground 50W, 10 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1913W50(0.5)	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** flood 45° **0045** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	2,000lm




QUICKINFO

Inground 30W, 10 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1913W30(0.5)	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	2,250lm




QUICKINFO

Inground 30W, 10 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1913W30(0.5)	medium 20° **0020** medium 30° **0030** elliptic 10°x30° **1030** elliptic 10°x60° **1060**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	1,200lm



QUICKINFO

Inground 30W, 5 high-power LEDs
ULTRA SPOT
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1913W30(0.3)	ultra spot 2.5° **0002**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	1,350lm



QUICKINFO

Inground 30W, 5 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1913W30(0.3)	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	2,250lm



QUICKINFO

Inground 30W, 5 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1913W30(0.3)	spot 9° **0009** narrow 15° **0015** medium 20° **0020** medium 30° **0030** flood 45° **0045** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	1,200lm




QUICKINFO

Inground 20W, 5 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1913W20(0.3)	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	1,500lm




QUICKINFO

Inground 20W, 10 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1913W20(0.3)	medium 20° **0020**	RGB+3000K **4130K**	DMX512	stainless steel **01**	800lm
	medium 30° **0030**	RGB+4000K **4130K**			
	elliptic 10°x30° **1030**				
	elliptic 10°x60° **1060**				

honeycomb **1913A1**

anti-slip glass **1913A2**



QUICKINFO

Inground 45W, 24 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1917W45	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** wide flood 60° **0060** elliptic 10°x60° **1060**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	3,370lm




QUICKINFO

Inground 48W, 24 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1917W48	medium 20° **0020** flood 45° **0045** wide flood 60° **0060** elliptic 15°x25° **1525** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	1,920lm



QUICKINFO

Inground 21W, 18 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1917W21	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** wide flood 60° **0060** elliptic 10°x60° **1060**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	1,570lm



QUICKINFO

Inground 28W, 12 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1917W28(0.5)	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** wide flood 60° **0060** elliptic 10°x60° **1060**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	2,100lm



QUICKINFO

Inground 24W, 12 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1917W24(0.5)	medium 20° **0020** flood 45° **0045** wide flood 60° **0060** elliptic 15°x25° **1525** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	960lm



QUICKINFO

Inground 12W, 6 high-power LEDs
4-IN-1
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1917W12(0.5)	medium 20° **0020** flood 45° **0045** wide flood 60° **0060** elliptic 15°x25° **1525** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	stainless steel **01**	480lm



QUICKINFO

Inground 14W, 12 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1917W14(0.5)	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** wide flood 60° **0060** elliptic 10°x60° **1060**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	1,050lm



QUICKINFO

Inground 7W, 6 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1917W7(0.3)	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** wide flood 60° **0060** elliptic 10°x60° **1060**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	520lm



honeycomb **1917A1**



anti-slip glass **1917A2**

ARC-SIDE





ARC-SIDE

GROUND SURFACE ILLUMINATION

LUMINAIRE:

- Stainless steel body and engineering plastic recessed box
- High protection resistant to corrosion and weathering
- Can be walked over and driven over at maximum speed 20 km/h
- Electrically neutral thermal path to ensure performance
- Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lenses
- Symmetrical light distribution
- Spot, narrow, medium, and wide flood optics

LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for facade lightging

INSTALLATION:

- For outdoor installation with ground recessed box

SS





ARC-SIDE




QUICKINFO

Inground 10W, 1 high-power LED
1-side light emission
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10 III

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1915W10	spot 5° **0005** narrow 15° **0015** medium 30° **0030** wide flood 60° **0060**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	600lm




QUICKINFO

Inground 3W, 1 high-power LED
1-side light emission
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10 III

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1915W3	wide flood 60° **0060**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	180lm




QUICKINFO

Inground 2x5W, 2 high-power LEDs
2-side light emissions
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10 III

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1915W2X5	spot 5° **0005** narrow 15° **0015** medium 30° **0030** wide flood 60° **0060**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	600lm




QUICKINFO

Inground 2x2W, 2 high-power LEDs
2-side light emissions
Input DC24V constant voltage
Remote power supply ordered separately

CE IP67 IK10 III

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1915W2X2	wide flood 60° **0060**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	240lm




QUICKINFO

Inground 4x1W, 4 high-power LEDs
4-side light emissions
Input DC24V constant voltage
Remote power supply ordered separately

IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1915W4X1	wide flood 60° **0060**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	240lm




QUICKINFO

Inground 4x1W, 4 high-power LEDs
12-side light emissions
Input DC24V constant voltage
Remote power supply ordered separately

IP67 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1915W4(12)	narrow 15° **0015**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	240lm

GOCCIA



WESTERN HILL PARK . HAINING . CHINA

GROUND LUMINAIRES . DAOU 2023/24

GOCCIA

FOLLOW THE LIGHTING

LUMINAIRE:

· Die-cast aluminum body
· Fluorocarbon powder paint resistant to corrosion and weathering
· Shock resistant tempered glass cover for protection
· Automatic self-cleaning system
· Electrically neutral thermal path to ensure performance
· Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

· Polycarbonate UV-resistant lenses
· Symmetrical light distribution
· Spot, narrow, medium, flood, wide flood and elliptic optics
· Built-in anti-glare accessories for improved visual comfort

LIGHT COLOUR MANAGEMENT:

· High uniformity and consistency for facade lightging
· 4-in-1 LEDs available for colour mixing versions

INSTALLATION:

· For outdoor installation on ground with base
· Adjustability on both horizontal and vertical axes

RAL 9023








QUICKINFO

On-ground 120W, 25 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1916W120	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	9,600lm




QUICKINFO

On-ground 150W, 24 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1916W150	narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	6,750lm




QUICKINFO

On-ground 75W, 16 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1916W75	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	6,000lm




QUICKINFO

On-ground 100W, 16 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1916W100	narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	4,500lm




QUICKINFO

On-ground 45W, 9 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1916W45	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	3,600lm




QUICKINFO

On-ground 60W, 9 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1916W60	narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	2,700lm




QUICKINFO

On-ground 30W, 6 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1916W30	spot 6° **0006** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045** wide flood 60° **0060** elliptic 10°x70° **1070**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	2,400lm




QUICKINFO


On-ground 30W, 6 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK08

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1916W30	narrow 15° **0015** medium 20° **0020** medium 30° **0030** elliptic 15°x60° **1560**	RGB+3000K **4130K** RGB+4000K **4130K**	DMX512	RAL9023 **01**	1,350lm



honeycomb **1916A1**

for models with optics > 30°



anti-glare glass **1916A2**


RED BRICK WAREHOUSE . MAIZURU . JAPAN

WALL LUMINAIRES

DESIGNED TO DELIVER BOTH ACCENT AND GENERAL LIGHTING



luminaire	lumen flux	page
BLADE L	1,100 - 1,800	255
BLADE M	600 - 1,000	261
BLADE S	150	267
NIKO WALL	640 - 2,800	273
NIKO CEILING	640 - 1,300	281

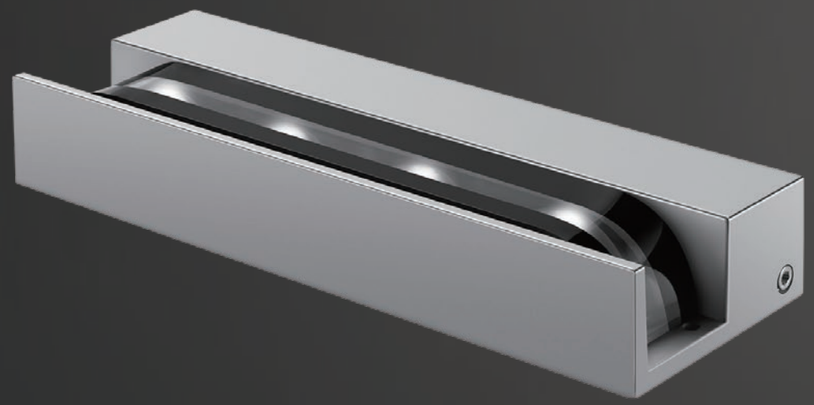

BLADE L

BLADE L

CREATE ART OF LIGHT



LUMINAIRE:

· Aluminum body
· Fluorocarbon powder paint resistant to corrosion and weathering
· Automatic self-cleaning system
· Electrically neutral thermal path to ensure performance
· Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

· Polycarbonate UV-resistant lenses
· Symmetrical light distribution
· Blade light effect window reveal lighting optics

LIGHT COLOUR MANAGEMENT:

· High uniformity and consistency for facade lightging

INSTALLATION:

· For outdoor installation on floor, wall or ceiling with bracket
· Adjustability on horizontal axis

RAL 9023









QUICKINFO

Light blade 36W, 16 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2021W36	light blade effect	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	1,800lm



QUICKINFO

Light blade 36W, 16 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately


DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2021W36	light blade effect	RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512	RAL9023 **01**	1,100lm



COLLEGE TUNNEL . CHONGQING . CHINA

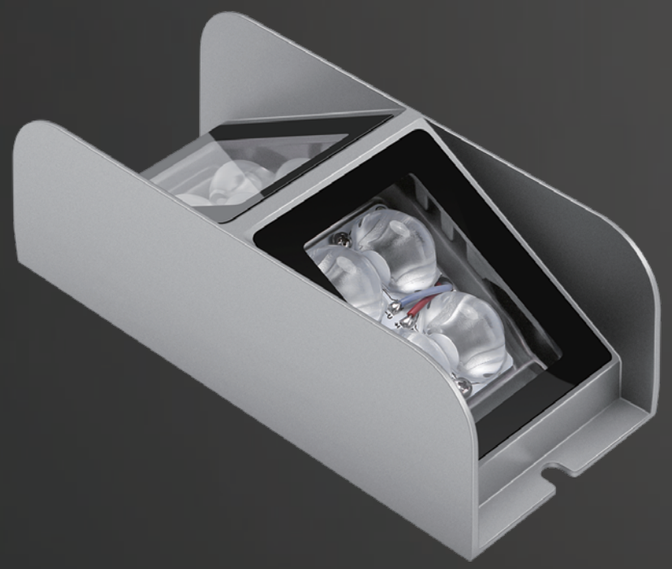

BLADE M

BLADE M

PRODUCE DIFFERENT LIGHT



LUMINAIRE:

· Aluminum body
· Fluorocarbon powder paint resistant to corrosion and weathering
· Automatic self-cleaning system
· Electrically neutral thermal path to ensure performance
· Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

· Polycarbonate UV-resistant lenses
· Symmetrical light distribution
· Blade light effect window reveal lighting optics

LIGHT COLOUR MANAGEMENT:

· High uniformity and consistency for facade lightging

INSTALLATION:

· For outdoor installation on floor, wall or ceiling with base

RAL 9023



NANBU BUILDING . SUZHOU . CHINA



QUICKINFO

Light blade 20W, 8 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2020W20	light blade effect	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	1,000lm




QUICKINFO

Light blade 20W, 8 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2020W20	light blade effect	RGB+3000K **RGB30K** RGB+4000K **RGB40K**	DMX512	RAL9023 **01**	600lm

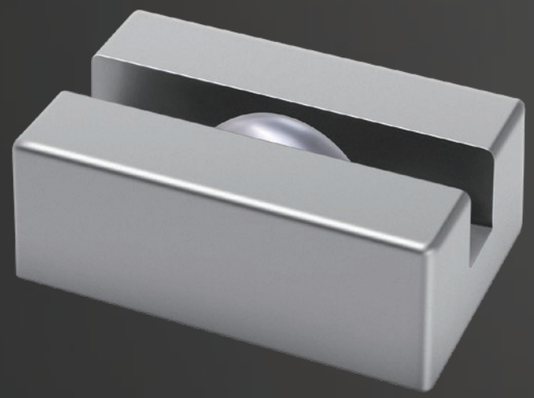

BLADE S

BLADE S

GIVE THE IMPRESSION



LUMINAIRE:

· Aluminum body
· Fluorocarbon powder paint resistant to corrosion and weathering
· Automatic self-cleaning system
· Electrically neutral thermal path to ensure performance
· Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

· Polycarbonate UV-resistant lenses
· Symmetrical light distribution
· Blade light effect window reveal lighting optics


LIGHT COLOUR MANAGEMENT:

· High uniformity and consistency for facade lightging

INSTALLATION:

· For outdoor installation on floor, wall or ceiling with base

RAL 9023








QUICKINFO

Light blade 3W, 1 high-power LED
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2019W3	light blade effect	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	150lm



NIKO WALL

NIKO WALL

MADE BRIGHT IDEAS



LUMINAIRE:

· Aluminum body
· Fluorocarbon powder paint resistant to corrosion and weathering
· Shock resistant tempered glass cover for protection
· Automatic self-cleaning system
· Electrically neutral thermal path to ensure performance
· Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

· Polycarbonate UV-resistant lenses
· Symmetrical light distribution
· Spot, narrow, medium, and flood optics

LIGHT COLOUR MANAGEMENT:

· High uniformity and consistency for facade lightging

INSTALLATION:

· For outdoor installation on wall with base

RAL 9023






QUICKINFO

Wall light 2x18W, 18 high-power LEDs
UP & DOWN
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK07

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2022W2X18	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	2x 1,440lm




QUICKINFO

Wall light 2x10W, 18 high-power LEDs
UP & DOWN
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK07

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2022W2X10	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	2x 800lm




QUICKINFO

Wall light 2x8W, 6 high-power LEDs
UP & DOWN
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK07

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2022W2X8	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	2x 640lm




QUICKINFO

Wall light 16W, 9 high-power LEDs
DOWN
Input voltage AC100-240V
Complete with built-in power supply

IP66 IK07

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2022W16	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	1,280lm




QUICKINFO

Wall light 8W, 3 high-power LEDs
DOWN
Input voltage AC100-240V
Complete with built-in power supply

CE IP66 IK07

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2022W8	spot 8° **0008**	2700K **2780**	ON/OFF	RAL9023 **01**	640lm
	narrow 12° **0012**	3000K **3080**			
	medium 20° **0020**	4000K **4080**			
	medium 30° **0030**				
	flood 45° **0045**				



NIKO CEILING

NIKO CEILING

PERFORMANCE AND EFFICIENCY



LUMINAIRE:

· Aluminum body
· Fluorocarbon powder paint resistant to corrosion and weathering
· Shock resistant tempered glass cover for protection
· Automatic self-cleaning system
· Electrically neutral thermal path to ensure performance
· Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

· Polycarbonate UV-resistant lenses
· Symmetrical light distribution
· Spot, narrow, medium, and flood optics

LIGHT COLOUR MANAGEMENT:

· High uniformity and consistency for facade lightging

INSTALLATION:

· For outdoor installation on ceiling with base

RAL 9023






QUICKINFO

Ceiling light 16W, 9 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS




CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2023W16	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	1,280lm



QUICKINFO

Ceiling light 8W, 3 high-power LEDs
Input voltage AC100-240V
Complete with built-in power supply

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
2023W8	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	RAL9023 **01**	640lm

UNDERWATER LUMINAIRES

BORN TO CREATE AN UNIQUE CONCEPT FOR UNDERWATER ENVIRONMENTS

luminaire	lumen flux	page
CATCH SPOT	280 - 1,200	289
CATCH UPLIGHT	280 - 1,200	295

CATCH SPOT





new

CATCH SPOT

HIGHLIGHT UNDERWATER DETAILS

LUMINAIRE:

- Stainless steel body
- Designed and engineered for the highest performance underwater
- Shock resistant tempered glass cover for protection
- Electrically neutral thermal path to ensure performance
- Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lenses
- Symmetrical light distribution
- Spot, narrow, medium, and flood optics

LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for lightging

INSTALLATION:

- For underwater installation on floor with bracket
- Adjustability on horizontal axis

SS








QUICKINFO

Underwater 16W, 9 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP68 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1102W16	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	1,200lm




QUICKINFO

Underwater 16W, 9 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP68 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1102W16	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045**	RGB **RGB**	DMX512	stainless steel **01**	640lm




QUICKINFO

Underwater 7W, 6 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP68 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1102W7	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	530lm




QUICKINFO

Underwater 7W, 6 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP68 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1102W7	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045**	RGB **RGB**	DMX512	stainless steel **01**	280lm

CATCH UPLIGHT



PRIVATE HOUSE . EUROPE



UNDERWATER LUMINAIRES . DAOU 2023/24

new

CATCH UPLIGHT

MAGICAL LIGHT FROM BELOW

LUMINAIRE:

- Stainless steel body and engineering plastic recessed box
- Designed and engineered for the highest performance underwater
- Shock resistant tempered glass cover for protection
- Electrically neutral thermal path to ensure performance
- Complies with standards EN60598 and pertinent regulations

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lenses
- Symmetrical light distribution
- Spot, narrow, medium, and flood optics

LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for lightging

INSTALLATION:

- For underwater installation on floor with recessed box

SS








QUICKINFO

Underwater 16W, 9 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP68 IK10

DIMENSIONS

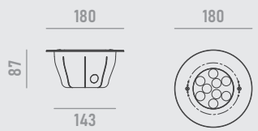

CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1103W16	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	1,200lm




QUICKINFO

Underwater 16W, 9 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP68 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1103W16	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045**	RGB **RGB**	DMX512	stainless steel **01**	640lm




QUICKINFO

Underwater 7W, 6 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP68 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1103W7	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045**	2700K **2780** 3000K **3080** 4000K **4080**	ON/OFF	stainless steel **01**	530lm




QUICKINFO

Underwater 7W, 6 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately

CE IP68 IK10

DIMENSIONS



CODE	Optics	Light colour	Control	Finish colour	Luminous flux
1103W7	spot 8° **0008** narrow 12° **0012** medium 20° **0020** medium 30° **0030** flood 45° **0045**	RGB **RGB**	DMX512	stainless steel **01**	280lm



NOTES

NOTES

DAOU®

HAINING DAOU LIGHTING CO., LTD.

No.23, Wenli Road, 314400 Haining Zhejiang, CHINA
Tel.: +86-573-80782850 Fax: +86-573-80782852
export@daoultd.com www.daoultd.com

We reserve the right to amend all the technical specifications of the luminaires
at any time and without prior notice, depending on the progress of research and product development
The present catalogue replaces the previous ones
Unauthorized reproductions and copies are prohibited

DAOU®

PUSH THE BOUNDARIES OF ARCHITECTURE

For more information
about our products please scan the QR-Code
or visit our website www.daoultd.com