


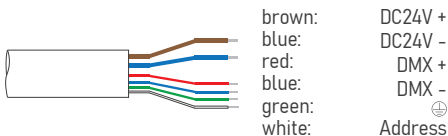
PRODUCT DATASHEET

Last information update: Feb. 2025



Wiring

Power/DMX input cable OPEN END 1,000 mm



CUBE MINI

0814W6

Architectural LED floodlight for outdoor applications

Technical Features

Power	6W
Input voltage	DC24V (constant voltage)
Insulation class	III
Delivered flux	270 lm ±10%
Light distribution type	Symmetrical / elliptical
Beam angle	20°, 45°, 60° / 15°x25°, 15°x60°
Light colour / CCT	RGBW
CRI	-
Source type	LED (4-IN-1)
LED number	1
MacAdam step	-
Power supply	Not included
Control	DMX512 (built-in DMX decoder)
Protection index	IP66
Impact resistance	IK08
Lifetime	50,000 hours Ta=25°C

Construction

High weather-resistant fluorocarbon painted die-cast aluminum body, tempered glass cover, polycarbonate optical lenses.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C






Installation

Surface mounted with adjustable bracket (standard).

Finish Colours

RAL9023 Pearl Dark Grey (standard). Other RAL colours on request.

Optional Accessories

	honeycomb louvre *can not be ordered separately		A02
	anti-glare visor *can not be ordered separately		A06
	spike *can not be ordered separately		A16
	clamp *can not be ordered separately		A17

Ordering Information

example: 0814W6.0020.4130K.01+A02

0814W6 · · · +

product	beam angle		light colour / CCT		finish colour		accessory	
CUBE MINI 6W	0020	20°	4130K	RGB+3000K	01	RAL9023	A02	honeycomb louvre
	0045	45°	4140K	RGB+4000K			A06	anti-glare visor
	0060	60°					A16	spike
	1525	15°x25°					A17	clamp
	1560	15°x60°						